

26

28

26

MODIFICATION SHEET WAM4/33

Title of modification

Elimination of QTD 100 relay and BPQ 100 switch.

Purpose of modification

The first 84 locos provided with Siemens contactors C118 (without time delay) and associated time delay relay QTD 100 are to be eliminated when replaced by Alsthom contactor C118, which is provided with its own time delay contact.

Modification Drg No. RDEO SK EL 2305.


Work to be carried out

The modification involves eliminating QTD 100 relay and BPQ 100 push button switch in I Q 100 circuitry.

Execution of work and material schedule

The work is to be carried out on the first 84 locos which had been provided with Siemens Contactor C 118. This is to be undertaken by Railways during replacement of Siemens contactor by Alsthom contactor C 118 as per modification sheet No. WAM4/1F.

...

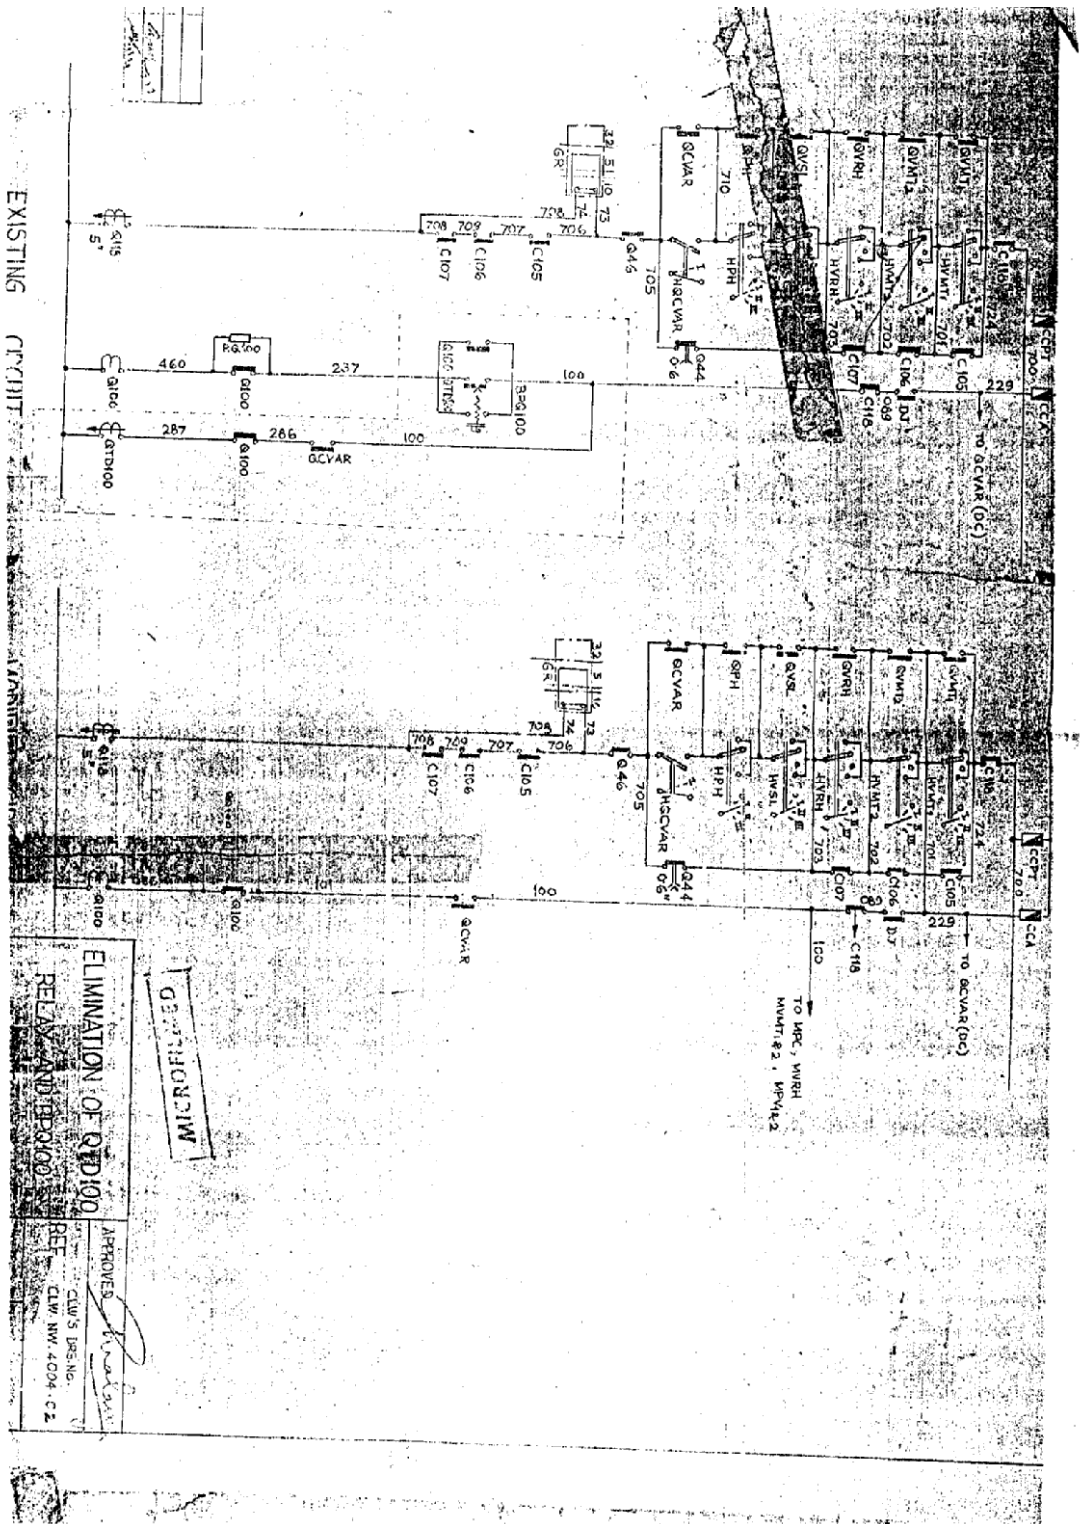

EXISTING

TO ACVAR (DC)

TO ACVAR (DC)

TO ACVAR (DC)

TO ACVAR (DC)

TO ACVAR (DC)

TO ACVAR (DC)

TO ACVAR (DC)

TO ACVAR (DC)

TO ACVAR (DC)

TO ACVAR (DC)

TO ACVAR (DC)

TO ACVAR (DC)

TO ACVAR (DC)

ELIMINATION OF QTD 100
RELAY AND BEQ 100

MICROFILMED

APPROVED
CLW'S DESIG.
CLW, NW, 4004-C2