

ISO 9001: 2015 2008	Document No- IRS:S-105/ 2025 2012	Version: 1.0 0	Date Effective: DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

RESEARCH DESIGNS & STANDARDS ORGANISATION
MANAK NAGER, LUCKNOW – 226 011



सत्यमेव जयते

INDIAN RAILWAY STANDARD SPECIFICATION
FOR
BLOCK PROVING BY AXLE COUNTER USING UFSBI (BPAC)

SPECIFICATION NO. - IRS:S-105/2025
VERSION: 1.0 (Draft 1)

SIGNAL DIRECTORATE
RESEARCH DESIGNS & STANDARDS ORGANISATION
MINISTRY OF RAILWAYS
MANAK NAGER, LUCKNOW – 226 011

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 1 of 58

ISO 9001: 2015 2008	Document No- IRS:S-105/ 2025 2012	Version: 1.0 0	Date Effective: DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

DOCUMENT DATA SHEET			
Designation			Version 1.0 (Draft 1)
IRS S: 105/20252012			
Title of Document			
Indian Railway Standard Specification for Block Proving with Axle Counter using UFSBI			
Author :See Document Control Sheet			
Signed by: Triambak Tiwari Designation: Director/Signal-II/RDSO			
Approved by:			
Shri Suresh Kumar Designation: Principal Executive Director/Signal& Telecommunication, RDSO			
Abstract: This document defines specification for Block Proving with Axle Counter using UFSBI			

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 2 of 58

ISO 9001: 2015 2008	Document No- IRS:S-105/ 2025 2012	Version: 1.0 0	Date Effective: DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

DOCUMENT CONTROL SHEET

NAME	ORGANISATION	FUNCTION	LEVEL
Triambak Tiwari	RDSO	Member	Prepare
Shri Suresh Kumar	RDSO	Approving Authority	Approve

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 3 of 58

ISO 9001: 2015 2008	Document No- IRS:S-105/ 2025 2012	Version: 1.0 0	Date Effective: DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

AMENDMENTS:

Version	Chapter/Annexure	Amendment	Effective date
0	-	First issue	13.09.2012
1.0	i) In compliance to RDSO-Vig policy [letter no.: 13/Vig/Policy/dt29.07.2016 reg to include ISO DOCs as a separate clause] ii) To include Part nos of Siemens make Push buttons in Para-3.1.30 iii) Due to change in status of specification (from SPN to IRS), relevant references (cl.0.2) requires to be changed iv) List of climatic test (to be included in the spec) for Block Panel v) AC Immunity test (tolerance of Induced voltage) may be considered to include as this issue has been raised by SCR vi) Based on field observations, Specific information supplied by Rlys needs to be reviewed in line of – - What equipments are supplied by vendor and -What systems/equipments (Cable, SSDAC, Relays etc) supplied by Rlys to be mentioned explicitly. vii) Other minor additions/ Typographical corrections.	Version-1.0	DD.MM.2025

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 4 of 58

ISO 9001: 2015 2008	Document No- IRS:S-105/ 2025 2012	Version: 1.0 0	Date Effective: DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

Table of Content		Page No.
0	Foreword	6
1.0	Scope	7
2.0	Terminology	7
3.0	Requirements	7-17
4.0	Indications on Block Panel	17-21
5.0	Brief system description & working	21
6.0	Principle of working	21
7.0	Description of Block panel for Single Line	22-23
8.0	Description of Block panel for Double Line	23-24
9.0	Method of signaling Trains from Block station to Block station for single line	24-37
10.0	Method of signaling Trains from Block station to Block station for double line	37-51
11.0	Method of "line clear cancellation" both for Single & Double lines	52
12.0	Design Criteria	52
13.0	System Requirements	52
14.0	Information to be given by supplier	53
15.0	Information to be given by purchaser	53
16.0	Documentation	53
17.0	Acceptance criteria	53
18.0	Inspection	54
19.0	Test procedure	54
20.0	Marking	54
21.0	Packing	54
22.0	Warranty	54
23.0	Climatic Tests	55-57
24.0	The test for Software check-sum	57
25.0	Vendor-changes in approved status	58

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 5 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

**GOVERNMENT OF INDIA
MINISTRY OF RAILWAYS
(RAILWAY BOARD)**

**INDIAN RAILWAY
STANDARD SPECIFICATION FOR
BLOCK PROVING WITH AXLE COUNTER USING UFSBI**

0. FOREWORD

- 0.1 This specification is issued under the fixed Serial No. **IRS: S-105** followed by the year of adoption as standard or incase of revision the year of latest revision.
- 0.2 This specification requires reference to the following Indian Railway Standards (IRS) and Indian Standards (IS) and RDSO/SPN.

IRS: S-23	Indian Railway Standard Specification for electrical and electronic based signaling and Interlocking equipment
RDSO/SPN/144	Safety and reliability of electronic signaling equipment
RDSO/SPN/177	Specification of Single Section Digital Axle Counter (SSDAC)
IRS:S-104/2012 RDSO/SPN/147	Specification of Universal Fail-Safe Block Interface (UFSBI)
RDSO/ SPN/165	Specification of SMPS based Integrated Power Supply System (IPS) for S&T Installation of Indian Railways.
IRS: S-76	Specification of Cable, Signaling Indoor for Signaling Installations
IRS: S-86	Specification for Battery Charger for Signaling Installations
IRS: S- 21	Specification of EKT
IRS: S -61	Fail Safe Electronic Timer
IRS:TC- 30	Specification for Jelly filled Quad cable.
BRS: 930A& 931A	Relays 'Q' Series' Neutral Line relays.
IS: 5	Colors for ready mixed paints and enamels.
IS: 513	Cold rolled low carbon steel sheets and strips - Specification
IS: 694	Specification for PVC insulated cable
IS: 814	Covered electrodes for manual metal arc welding of carbon and carbon manganese steel - Specification
IS: 1573	Specification for electroplated coatings of zinc on iron and steel
IS:2147	Degree of protection provided by enclosures for low-voltage switchgear and control gear.
IS: 2629	Recommended practice for hot-dip galvanising of iron and steel
IS:7088	Recommended practice for anodizing aluminum and its alloys
IS:7569	Specification for cast acrylic sheets for use in luminaries
IEC 947-7-1	International standard on terminal blocks for copper conductors.

- 0.3 Whenever in this specification, any of the above mentioned specification is referred by number only, without mentioning the year of issue, the latest issue of that specification is implied, otherwise the particular issue referred to is meant.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 6 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

0.4 This specification is intended to cover the technical provisions and it does not include all the necessary provisions of a contract.

1.0 SCOPE

1.1 This specification covers the general and technical requirements of Block Proving with Axle Counter using UFSBI to be used over Indian Railways for block working.

1.2 The specification covers integrated type block panel but not covers domino type panels. The body of panel should be fabricated from 18 SWG CRC MS sheet conforming to specification IS- 513 grade D.

2.0 Terminology:

The terminology as given in IRS:S-23 shall be applicable. In additions to the other terms which are referred in the specification are given below-

2.1 Rated voltage: The nominal voltage at which the Block System is designed to operate.

2.2 Rated Current: The nominal current consumption of Block System.

3.0 Requirements:

The Block Proving system will require the following sub systems for its working as per scheme depicted in **RDSO Drg.NO. RDSO/S/32017 Sheet No.1 for Double Line and RDSO/S/32019 Sheet No. 1 for Single Line:**

- (i) Block Panel
- (ii) Universal Fail Safe Block Interface
- (iii) Single Section Digital Axle Counter
- (iv) Block Telephone
- (v) Telecom cable, voice/ data channels provided over optical fiber or microwave system using proper multiplexer.
- (vi) Battery Set
- (vii) Battery Charger / IPS module
- (viii) Relay rack with relays

3.1 Block Panel

3.1.1 Mechanical & Physical requirements:

Panel shall suit to RDSO's Drg No. RDSO:S- 32017 Sheet no. 2 & 3 for double line& RDSO: S 32019 Sheet no. 2 & 3 for single line. Body of panel to be made of CRC MS sheet of thickness not less than 18 SWG conforming to specification IS : 513 grade 'D'. Panel shall bed rip proof and shall be protected against ingress of water. Sufficient strength, rigidity and stability required shall be ensured.

3.1.2 Body of the cabinet shall be free from dents, undulations, surface irregularities etc.

3.1.3 MS sheets shall be welded together and to its structure properly, if required, ensuring no welding defects.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 7 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

3.1.4 Standard fasteners to relevant specification with zinc plating / Nickel plating shall be used for fastening.

3.1.5 Riveting, wherever necessary, to be carried out properly as per standard engineering practice.

3.1.6 Provision shall be made for locking the back door.

3.1.7 The terminals used in the panel shall be non-disconnecting type polymer (6.6 Polyamide/nylon 6.6/Malamine) based terminals or Phoenix/Wago make with DIN rail mounting arrangements.

3.1.8 Surface of the panel except faceplate shall be treated with chromate Primer followed by powder coating in Siemens gray color thickness as per current industry standards with Texture finish.

3.1.9 The faceplate will be made of 16 SWG MS, with an anodized aluminum faceplate above it.

3.1.10 Faceplate shall be free from all surface irregularities such as dents, tool marks, undulations etc.

3.1.11 Faceplate shall be covered with colorless (transparent) acrylic sheet of 4 mm thickness $\pm 0.5\text{mm}$ as per IS: 7569. Acrylic sheet should not have any scratch, air bubbles, foreign material or any other marks.

3.1.12 Transparent acrylic sheet shall be fixed on top of the faceplate by a removable frame of minimum 3 mm thickness.

3.1.13 Panel shall have holes in the base suitable to fix the panel on the table.

3.1.14 All metallic nuts, bolts and washers used in fabrication of the panel shall be suitably zinc coated as per IS: 1573 to ensure rust proof working for entire life of the panel.

3.1.15 Metal arc-welding, wherever used, shall be done with welding electrodes as per IS: 814.

3.1.16 Panel shall conform to IP-54 class of protection as specified in table 1 of IS: 2147

3.1.17 Panel shall be provided with back covers. Back covers shall be easily opened to facilitate access to the internal wiring, termination etc. and shall be provided with double lock and sealing facility.

3.1.18 Legends shall be painted legibly on the panel faceplate as specified in the drawing.

3.1.19 Faceplate shall be firmly fixed on the cabinet using fasteners.

3.1.20 Station Master's (SM's) key lock shall be provided at top of the faceplate. The key shall normally remain locked in-turned position.

3.1.21 Small metal parts e.g. nuts, bolts, washers and such other outside fittings shall be suitably plated.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 8 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

- 3.1.22 All component elements shall be rigidly fixed to withstand normal shock and vibration.
- 3.1.23 The panel shall be wired using 16/ 0.2 wire conforming to specification IRS: S-76.
- 3.1.24 Individual termination shall be marked with a unique number for easy identification.
- 3.1.25 Wiring inside the panel shall be properly bunched using cable ties and supported.
- 3.1.26 Any break or short circuit in wires shall not cause a wrong indication or operation of counter or pick-up of a wrong relay.
- 3.1.27 A laminated copy of wiring diagram and termination details of the panel portion shall be pasted inside back cover of the panel.
- 3.1.28 Block panel should pass insulation resistance test before and after applied high voltage test as per Cl. 9.5 & 9.6 of RDSO/SPN/144.
- 3.1.29 Block Panel should be able to function at a distance of 50 M. from the Relay Rack. If the distance from block panel to relay rack is more than 50M, 1.5 sq mm out door signaling cable shall be used.

3.1.30 Parts of Block Panel:

3.1.30.1	Push Buttons The push buttons will be of Siemens or L&T(ESBEE) make as detailed below
3.1.30.1.	Push Button Actuator Type: HD 55C1 (Red) or HD 55C2 (Green) or HD 55C3 (Black) & HD 55C4 (Yellow) Type: 3SU1050-0AB20-0AA0 (Red) or 3SU1050-0AB40-0AA0 (Green) or 3SU10500AB10-0AA0 (Black) & 3SU1050-0AB30-0AA0 (Yellow)
3.1.30.1.2	Contact Element for Push Button and key actuator Type: HC61A2 (INO), HC61B2 (INC) Type: 3SU1400-1AA10-1BA0 (1 NO), 3SU1400-1AA10-1CA0 (1 NC)
3.1.30.2	Key& Switches: The switches and keys shall be of different make. The LCB key or Shunt Release Key is L&T make (ESBEE brand) or Siemens make with catalog number HK85C3 or 3SU1050-4BF01-0AA0 for Key Actuator & HC61A2 (1 NO) / HC61B2 (1NC) 3SU1400-1AA10-1BA0 (1 NO), 3SU1400-1AA10-1CA0 (1 NC) for elements. The SM's key is Siemens make with catalog number CES1 or 3SB50004AA01 & for actuator 3SB04 00-0B or 3SB54000E for element.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 9 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

3.1. 30.3 LEDs:

- (i) LED's used shall be high intensity super bright water clear type of Agilent / Nichia make and must have 5 mm diameter and clear body/lens.
- (ii) LEDs shall be with viewing angle of 15 °. An illuminated LED should be visible from minimum 3 meters in clear daylight. Part no. and manufacturer's data sheet of LEDs used shall be supplied with the panel.

3.1.30.4 Electromagnetic Impulse Counter:

Electro magnetic impulse counter shall be 6 Digit, 10 impulse per second minimum, 24V DC non-resettable type, Shinmei make, Type ECT-6A or Keltron Make: Type EM010 or Fritz Kubler: Type W16.20

3.1.30.5 Buzzers:

Separate buzzers with different audio frequencies, working at 24 volts (+20% -10%) DC for audio alarm should be provided to register the BELL CODE sent by other end SM & to register the occupation and clearance of each Block Section. The buzzer for receive line shall be intermittent and for dispatch line shall be continuous type. Provision to mute the audio alarm through pressing an acknowledgement push button shall be provided. Block buzzer shall work through block telephone line.

3.2 UNIVERSAL FAIL-SAFE BLOCK INTERFACE:

Universal Fail-Safe Block Interface (UFSBI) required to interface the conventional block instruments over Telecom cable, voice/ data channels of any media like OFC & Digital Radio using proper multiplexer.

3.3 Single Section Digital Axle Counter:

Single Section Digital Axle Counter consists of a pair of axle detectors connected together by a transmission medium in VF range. It is capable of counting axles; count-comparisons, supervision, relay drive and transmission of counts and health of axle detector. Digital Axle Counter track relay output is available at both ends of the track section.

3.4 Block Telephone:

3.4.1 For speech communication with SM at other end of Block Section.

3.4.2 Separate block telephone shall be provided for every block section.

3.4.3 Block Panel to have provision for hanging block telephone as shown in Drg. No. RDSO /S-32017 Sheet no. 3 for double line & RDSO /S - 32019 Sheet no. 3 for single line.

3.5 Quad Cable Or Voice channel:

Railways shall provide 4 pair copper conductors or 3 voice channels in OFC for single line block working and 5 pair copper conductor or 4 voice channels in OFC for double line block working from station to station. Cable shall be as per specification IRS:TC 30.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 10 of 58

ISO 9001: 2015 2008	Document No- IRS:S-105/ 2025 2012	Version: 1.0 0	Date Effective: DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

3.6 **Battery Set:** (Railways shall provide the battery set)

3.6.1 Block Proving with Axle Counter system comprising of Block Panel, Universal Fail-Safe Block Interface & relays shall work on 24 V D.C. with a maximum current consumption of 5A.

3.6.2 Separate power supply shall be provided for Digital Axle Counter.

3.6.3 Separate power supply shall be provided for Block Telephone.

3.7 **Charger / Module of IPS:**

3.7.1 The charger should be as per IRS S-86 to cater 5A/24V DC load.

3.7.2 The IPS module should be as per RDSO/SPN/165 to cater 5A/24V DC load.

3.8 **Relay Rack & Signaling Relays:**

3.8.1 Number of relays used for Double **Line Block working is 29 nos.** and for **Single Line Block working is 31 nos.** All the relays used as per the circuit diagram shall be of RDSO approved make. Relays used as repeater of external relays shall be of 1000 ohms. Relay Rack can be separate or it can be in the same cabinet of UFSBL The Electronic Fail Safe Timer (IRS: S - 61) shall be micro controller based only.

Alternatively, to minimize the number of relays, 2 out of 2 digital hardware logic (in compliance with CENELEC SIL-4 standard) based on reliable PLD / CPLD of reputed make like LAITICE / ALTERA / XYLINX, may be used to implement the Block Interlocking Logic with same functionality without any change in hardware / software or interfacing circuit of UFSBI (as per RDSO/SPN/147). The hardware logic module for Single Line and Double Line should be distinctly different and it shall not be possible to inter-change the modules. UFSBI should retain its functionality of Inter-station Block communication as per IRS:S-105 2012.

3.8.2 NOMENCLATURE OF RELAYS FOR SINGLE LINE WITH UFSBJ AS PER DRAWING NUMBER- RDSO/S-32020.

The nomenclature of various relays in the relays rack used at each station is given below -

	RELAY	TYPE and NORMAL STATUS	DESCRIPTION
3.8.2.1	TGTR	QL1, 11F.4B DROP	TRAIN GOING TO Relay. Operates to pick up on receipt of LINE CLEAR at train sending station. Normalises, when station at the other end sets to Line closed after train arrival or cancellation of LINE CLEAR.
3.8.2.2	TCFR	QL1, 11F.4B DROP	TRAIN COMING FROM Relay. Operates to pick up on receipt of LINE CLEAR enquiry from train sending station. Normalises after complete train arrival or cancellation of LINE CLEAR.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 11 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

3 8.2.3	ASCR	QN1, 8F.8B DROP	Advance Starter Signal Control relay. Picks up, when LINE CLEAR is available and necessary controls are reversed by SM. Drops in any of the under-mentioned cases: a) Entry of train in Block Section b) Withdrawal of an SM control
3.8.2.4	TGTXR	QN1, 8F.8B DROP	TRAIN GOING TO code Relay. Picks up at train sending station presses buttons for LINE CLEAR enquiry. Drops when train sending station releases buttons for LINE CLEAR enquiry.
3.8.2.5	TCFXR	QN1, 8F.8B DROP	TRAIN COMING FROM code Receive Relay. Picks up on receipt of LINE CLEAR enquiry from train sending station. Drops when station at other end releases buttons for LINE CLEAR enquiry.
3.8.2.6	TGTyr	QN1, 8F.8B DROP	TRAIN GOING TO code Receive Relay. Picks up on receipt of LINE CLEAR at train sending station. Drops in any of the under-mentioned cases: a) Entry of train in Block Section b) Cancellation
3.8.2.7	120 JPR	QN1,8F.8B DROP	Timer mature repeater Relay. Picks up on maturity of Timer for cancellation. Drops when block status set to Line Closed.
3.8.2.8	BPNR	QN1, 8F.8B DROP	Bell push button relay. Picks up on pressing of BELL push button else drop.
3.8.2.9	TGTNR	QN1, 8F.8B DROP	TRAIN GOING TO button Relay. Picks up on pressing of TRAN GOING TO push button else drop
3.8.2.10	CNR	QN1, 8F.8B DROP	CANCEL button relay. Picks up on pressing of CANCEL push button else drop.
3.8.2.11	FR1	QN1, 8F.8B DROP	Flash Controller relay No. 1.
3.8.2.12	FR2	QN1,8F.8B DROP	Flash Controller relay No. 2.
3.8.2.13	TAR1	QNA1, 8F.8B DROP	Train Arrival First Relay. Picks up when control on Reception Signal is Reverse and HSAT occupied by train and HSBT clear. Drops when HSAT clear with a delay.
3.8.2.14	TAR2	QN1, 8F.8B DROP	Train Arrival Second Relay. Picks up when control on Reception Signal is Reverse and HSAT clear and HSBT occupied by train. Drops when block status set to Line Closed.

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 12 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

3.8.2.15	CAR	QN1, 8F.8B DROP	CANCEL relay. Picks up at Train receiving station on initiation of cancellation provided all controls pertaining to Advance Starter and Reception Signal/Signals and signals controlled by them are at Normal at both the stations.
3.8.2.16	BTSR	QN1,8F.8B PICK UP	Block Track Stick Relay. Picks up when Block status is LINE CLOSED and Block track is clear. Drops in any of the under-mentioned cases: a) Entry of train in Block section b) Cancellation
3.8.2.17	AZTR	QNA1,8F.8B PICK UP	Block Section track Relay of Dispatch Line. Drops in the under mentioned case: (a) Entry of train in block section. (b) Failure of axle counter.
3.8.2.18	TGTZR	QN1,8F.8B PICK UP	Advance Starter Signal Normal Checking Repeater Relay. Picks up to repeat [D] ASGNCR at train receiving station after arrival of train or after a Line Clear cancellation has been initiated, else drops.
3.8.2.19	120 EJ	Electronic Time delay unit (Fail Safe	Timer unit for cancellation time of 120 seconds.
3.8.2.20	HS ATPR	QNA1, 8F.8B PICK UP	First track for direction proving repeater relay. Picks up when HSAT track circuit is vacant else drop.
3.8.2.21	HS BTPR	QNA1, 8F.8B PICK UP	Second track for direction proving repeater relay. Picks up when HSBT track circuit is vacant else drop.
3,8.2.22	AS GNCR	QNA1, 8F.8B PICK UP	Advance Starter Signal Normal Checking Relay. Picks up when Advance Starter Signal (LSS) and all its controls are at ON/Normal. else drop
3.8.2.23	HS GNCR	QNA1, 8F.8B PICK UP	Reception Signal Normal Checking Relay. Picks up when Reception signal/signals and all its controls are at ON/Normal, else drop
3.8.2.24	TCFCR	QN1, 8F.8B PICK UP	TRAN COMING FROM CANCEL relay. Picks up at Receiving station when CANCEL CO-OP button is pressed at sending station else drop.
3.8.2.25	TCFZR	QN1, 8F.8B PICK UP	TRAIN COMING FROM normal proving relay. Picks up at receiving station when TCFR drops else drop.
3.8.2.26	TGTPR	QN1, 8F.8B PICK UP	TRAIN GOING TO normal proving relay. Picks up at sending station when TGTR drops

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 13 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

			else drop
3.8.2.27	SHKR	QN1, 8F.8B PICK UP	Shunt Key indicating relay. Picks up when key of EKT is 'IN' & shunt Release key is OUT, else drop.
3.8.2.28	AS GNCPR	QN1, 8F.8B PICK UP	Advance Starter Signal Normal checking (for other station) Relay. Picks up when Advance Starter Signal and all its controls are at Normal at the other station, else drop.
3.8.2.29	BIPR1	QN1, 8F.8B TOGGLE	UFSBI health check relay.
3.8.2.30	BIPR2	QN1, 8F.8B TOGGLE	UFSBI health check relay.
3.8.2.31	BLR	QN1, 8F.8B DROP	BELL RELAY Pick u when other station presses the Bell button

3.8.3 NOMENCLATURE OF RELAYS FOR DOUBLE LINE WITH UFSBI AS PER DRAWING NUMBER- RDSO/S-32018.

The nomenclature of various relays in the relays rack used at each station is given below -

	RELAY	TYPE AND NORMAL STATUS	DESCRIPTION
3.8.3.1	TGTR	QL1, 11F.4B DROP	TRAIN GOING TO Relay. Operates to pick up on receipt of LINE CLEAR at train sending station. Normalises, when station in advance sets to Line Closed after train arrival or cancellation of LINE CLEAR.
3.8.3.2	TCFR	QL1, 11F.4B DROP	TRAIN COMING FROM Relay. Operates to pick up on receipt of LINE CLEAR enquiry from train sending station. Normalises after complete train arrival or cancellation of LINE CLEAR.
3.8.3.3	ASCR	QN1, 8F.8B DROP	Advance starter signal control relay Picks up, when LINE CLEAR is available and necessary controls are reversed by SM. Drops in any of the under-mentioned cases: a) Entry of train in Block Section. b) Withdrawal of an SM control.
3.8.3.4	TGTXR	QN1, 8F.8B DROP	TRAIN GOING TO code Relay. Picks up at train sending station pressing of buttons for LINE CLEAR enquiry. Drops when train sending station releases buttons for LINE CLEAR enquiry or picking up of TGTR which ever is earlier.

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 14 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

3.8.3.5	TGTYR	QN1, 8F.8B DROP	TRAIN GOING TO code Receive Relay. Picks up on receipt of LINE CLEAR at train sending station Drops in any of the under-mentioned cases: a) Entry of train in Block Section. b) Cancellation of Line Clear.
3.8.3.6	120 JPR	QN1, 8F.8B DROP	Timer mature repeater Relay. Picks up on maturity of Timer for cancellation. Drops when block status set to Line Closed.
3.8.3.7	BPNR	QN1, 8F.8B DROP	Bell push button relay. Picks up on pressing of BELL push button with SM's Key IN, else drop.
3.8.3.8	TGTNR	QN1, 8F.8B DROP	TRAIN GOING TO button Relay. Picks up on pressing of TRAIN GOING TO push button else drop.
3.8.3.9	CNR	QN1, 8F.8B DROP	CANCEL button relay. Picks up on pressing of CANCEL push button else drop.
3.8.3.10	FR1	QN1, 8F.8B DROP	Flash controller relay No. 1
3.8.3.11	FR2	QN1, 8F.8B DROP	Flash controller relay No. 2.
3.8.3.12	TAR1	QNA1, 8F.8BDROP	Train Arrival First Relay. Picks up when control on Reception Signal is Reverse and HSAT occupied by train and HS BT clear. Drops when AT clear with a delay.
38.3.13	TAR2	QN1, 8F.8B DROP	Train Arrival Second Relay. Picks up when control on Reception Signal is Reverse and HS AT clear and HS BT occupied by train. Drops when block status set to Line Closed.
318.3.14	CAR	QN1, 8F.8B DROP	CANCEL relay. Picks up at Train receiving station on initiation of cancellation provided all controls pertaining to Advance Starter and Reception Signal/Signals and signals controlled by them are atNormal at both the stations.
3.8.3.15	BTSR	QN1, 8F.8B PICK UP	Block Track Stick Relay. Picks up when Block status is LINE CLOSED and Block track is clear. Drops in any of the under-mentioned cases: a) Entry of train in Block Section. b) Cancellation of Line Clear.
3.8.3.16	(R) AZTR	QNA1, 8F.8B PICK UP	Block Section track Relay of receive line. Drops in the under mentioned cases: (a) Entry of train in block section, or (b) Axle Counter failure.

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 15 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

3.8.3.17	(D) AZTR	QNA1, 8F.8B PICK UP	Block Section track Relay of dispatch line. Drops in the under mentioned cases: (a) Entry of train in block section, or (b)Axle Counter failure
3.8.3.18	TGTZR	QN1, 8F.8B PICK UP	Advance Starter Signal Normal Checking Repeater Relay. Picks up to repeat Line Closed condition at train receiving station after arrival of train or after a Line Clear cancellation has been initiated, else drop.
3.8.3.19	TCFXR	QN1, 8F.8B DROP	TRAIN COMING FROM code Receive Relay. Picks up on receipt of LINE CLEAR enquiry from train sending station. Drops when station in rear releases buttons for LINE CLEAR enquiry or TGTR pick up which ever is earlier.
3.8.3.20	120 EJ	Electronic Time delay unit (Fail safe)	Timer unit for cancellation time of 120 seconds.
3.8.3.21	HS ATPR	QNA1, 8F.8B PICK UP	First track for direction proving repeater relay. Picks up when HSAT track circuit is vacant else drop.
3.8.3.22	HS BTPR	QNA1, 8F.8B PICK UP	Second track for direction proving repeater relay. Picks up when HS BT track circuit is vacant else drop
3.8.3.23	AS GNCR	QNA1, 8F.8B PICK UP	Advance Starter Signal Normal Checking Relay. Picks up when Advance Starter Signal and all its controls are at Normal, else drop.
3.8.3.24	HS GNCR	QNA1, 8F.8B PICK UP	Reception Signal Normal Checking Relay Picks up when Reception signal/signals and all its controls are at Normal, else drop.
3.8.3.25	AS GNCP R	QN1, 8F.8B PICK UP	Advance Starter Signal Normal checking (for other station) Relay Picks up when Advance Starter Signal and all its controls are at Normal at the other station, else drop.
3.8.3.26	BIPR1	QN1, 8F.8B TOGGLE	UFSBI health check relay.
3.8.3.27	BIPR2	QN1, 8F.8B TOGGLE	UFSBI health check relay.
3.8.3.28	TCFCR	QN1, 8F.8B PICK UP	TRAN COMING FROM CANCEL relay. Picks up at receiving station when CANCEL CO-OP button is pressed at sending station else drop.
3.8.3.29	BLR	QN1, 8F.8B DROP	BELL RELAY Pick when other station presses the Bell button

3.8.4 Wiring of Relay Rack:

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 16 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

3.8.4.1 The relay rack shall be wired using 16/0.2 wire conforming to specification IRS: S-76 (latest).

3.8.4.2 Every wire should be terminated properly. Termination of wires shall be done on non-disconnecting type terminals of Phoenix/Wago make with DIN rail mounting arrangements.

3.8.4.3 Individual termination shall be marked with a unique number for easy identification.

3.8.4.4 Wiring of relay rack shall be properly bunched using cable ties and support.

3.8.4.5 A laminated copy of wiring diagrams and termination details shall be provided along with supply.

4.0 Indications on Block Panel:

4.1 SM's Block Panel for Single Line is provided with following illuminated indications:

4.1.1	LINE CLOSED Indication	Circular indication in between the directional arrowhead. Mentioned in 4.1.2 & 4.1.3.
	YELLOW	To indicate Block Section free from vehicles and LINE CLEAR not granted /received at train receiving / train sending station respectively.
4.1.2	TRAIN COMING FROM Indication	In a directional arrowhead pointing downward for incoming traffic towards station.
	GREEN	To indicate LINE CLEAR granted, when TRAIN GOING TO Button and BELL button have been pressed at sending station and the conditions for the granting of LINE CLEAR at receiving station have been complied with and a rectangular indication named TCF lights up GREEN.
	RED	To indicate TRAIN ON LINE on entry of incoming train on LINE CLEAR and a rectangular indication named TOL lights up RED.
	FLASHING GREEN	To indicate: a) Block section clear after arrival of train, but associated Signals and their controls not normal at either station. b) Cancellation of LINE CLEAR before entry of train in Block Section. c) Block section clear after arrival of train, associated signals and their controls at normal at both stations but after unintentional insertion of Shunt Release Key IN when the train was in section.
4.1.3	TRAIN GOING TO Indication	In a directional arrowhead pointing upward for outgoing Traffic away from station at train sending station
	GREEN	To indicate LINE CLEAR received when TRAIN GOING TO button and BELL button have been pressed on Block Panel of train sending station and the condition for taking the LINE CLEAR have been complied with at both stations and a rectangular indication named TGT lights up GREEN.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 17 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

	RED	To indicate TRAIN ON LINE on entry of outgoing train on LINE CLEAR and a rectangular indication named TOL lights up RED.
	FLASHING GREEN	To indicate: a) Block Section Clear after arrival of train at other station, but associate signals and their controls not normal at either or both stations i.e. SNK off or Shunt key indication 'RED'. b) LINE CLEAR cancelled before entry of train in block section.
4.1.4	Cancel indication CO OP YELLOW CIRCLAR LED	Indication to indicate co-operation extended by station at other end for cancellation of Line Clear by pressing Cancel Cooperation button
4.1.5	Cancel indication FLASHING YELLOW	To indicate progress of LINE CLEAR cancellation timer of 120 seconds. The indication lights up on pressing of CANCEL along with BELL button, when TRAIN COMING FROM is displaying FLASHING GREEN indication.
4.1.6	SNK Indication SNKYELLOW	One such indication is provided. Provided near TRAIN GOING TO directional arrowhead to indicate LAST STOP SIGNAL, Reception signal(s) and their controls at ON/Normal.
4.1.7	SNOEK (SNK other end) YELLOW	Provided near TRAIN COMING FROM directional arrowhead to Indicate the following: (a) LAST STOP SIGNAL and its controls at station at other end are at ON/ Normal. (b) Shunt Key of EKT at other end station is 'IN'.
4.1.8	Last Stop Signal (LSS) Indication	Circular in monogram of signal.
	RED	To indicate Last Stop Signal is at 'ON'.
	GREEN	To indicate Last Stop Signal is at 'OFF'.
4.1.9	LINE FREE Indication GREEN	To indicate Block Section is clear of vehicles.
	LINE OCCUPIED Indication RED	To indicate Block Section is occupied.
4.1.10	ACKN indication YELLOW	A Indication near ACKN button. To indicate SECTION buzzer ON status.
4.1.11	SM KEY 'IN' indication GREEN	Indication near SM KEY. To indicate SM key "IN".

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 18 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

4.1.12	SHUNT KEY indication	GREEN - To indicate SHUNT KEY OF EKT IS "IN", RED- To indicate SHUNT KEY OF EKT IS "OUT".
4.1.13	UFSBI/MUX OK indication	Glows GREEN when MUX is OK otherwise Extinguished.
4.1.14	UFSBI/MUX FAIL indication	Glows RED when MUX goes into a failure mode otherwise Extinguished.
4.1.15	Communication LINKFAIL indication	Glows steady YELLOW when LINK FAILS otherwise flickering.

4.2SM's Block Panel for *Double Line* is provided with following illuminated indications

4.2.1	LINE CLOSED Indication YELLOW	Circular indications (Two Numbers) in between the directional arrowhead. To indicate Block Section free from vehicles and LINE CLEAR not granted /received at train receiving / train sending station respectively.
4.2.2	TRAIN COMINGFROM Indication	In a directional arrowhead pointing downward for incoming traffic towards station at train receiving station
	GREEN	To indicate LINE CLEAR granted, when TRAIN GOING TO Button and BELL button have been pressed at sending station and the conditions for the granting of LINE CLEAR at receiving station have been complied with and a rectangular indication named TCF lights up GREEN.
	RED	To indicate TRAIN ON LINE on entry of incoming train on LINE CLEAR.
	FLASHING GREEN	To indicate: a) Block section clear after arrival of train, but associated Signals and their controls not normal at either of station or LCB Key is OUT. b) Cancellation of LINE CLEAR before entry of train in Block Section.
4.2.3	TRAIN GOING TO Indication	In an arrowhead pointing upward for outgoing traffic away From station at train sending station and a rectangular indication named TGT.
	GREEN	To indicate LINE CLEAR received when TRAIN GOING TO button and BELL button have been pressed on Block Panel of train sending station and the condition for taking the LINE CLEAR have been complied with at both stations and a rectangular indication named TGT lights up GREEN.
	RED	To indicate TRAIN ON LINE on entry of outgoing train on LINE CLEAR and a rectangular indication named TOL

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 19 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

		lights up RED
	FLASHING GREEN	To indicate: a) Block Section clear after arrival of train at other station, but associated signals and their controls not normal at either or both stations or LCB Key is OUT at receiving station. b) LINE CLEAR cancelled before entry of train in block section.
4.2.4	Cancel CO-OP Indication YELLOW	Indication to indicate co-operation extended by station at other end for cancellation of line clear by pressing Cancel Cooperation button.
4.2.5	CANCEL indication	Circular LED.
	FLASHING YELLOW	To indicate progress of LINE CLEAR cancellation timer of 120 seconds. The indication lights up on pressing of CANCEL Button along with BELL button, when TRAIN COMING FROM is displaying FLASHING GREEN indication.
4.2.6	SNK Indications	Two such indications are provided.
	SNK YELLOW	i) SNK (D): Yellow provided near TRAIN GOING TO directional arrowhead to indicate LAST STOP SIGNAL and its controls at ON/ Normal.
		i) SNK (R): Yellow provided near TRAIN COMING FROM directional arrowhead to indicate reception signal (s) & its controls at ON/ Normal
4.2.7	SNOEK (SNK other end) YELLOW	Provided near TRAIN COMING FROM directional arrowhead to indicate LAST STOP SIGNAL and its controls at station in rear are at ON/ Normal.
4.2.8	Last Stop Signal (LSS) Indication	Circular in monogram of signal.
	RED	To indicate Last Stop Signal is at 'ON'.
	GREEN	To indicate Last Stop Signal is at 'OFF'.
4.2.9	LINE FREE Indication GREEN	To indicate Block Section is clear of vehicles.
	LINE OCCUPIED	To indicate Block Section occupied.
	Indication RED	
4.2.10	ACKN indication YELLOW	A Indication near ACKN button. To indicate SECTION buzzer ON status.
4.2.11	SM KEY 'IN' indication	Indication near SM KEY.
	GREEN	To indicate SM key "IN".

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 20 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

4.2.12	UFSBI/MUX OK indication	Glows GREEN when MUX is OK otherwise Extinguished.
4.2.13	UFSBI/MUX FAIL indication	Glows RED when MUX goes into a failure mode otherwise Extinguished.
4.2.14	Communication LINK FAIL Indication	Glows steady YELLOW when LINK FAILS otherwise flickering.

5.0 Brief System Description & Working:

The Block Panel will work in Absolute Block system incorporating Block Proving by Axle Counter to control the movement of trains on single line / double line block section from one block station to another in a fixed direction. These working instructions should be read in conjunction with General Rules (GR) of 1976 and its amendment in 2002. These working instructions do not supersede any rule laid down in GR.

6.0 Principle of working

- 6.1 The trains are worked on the Absolute Block system.
- 6.2 The block section is provided with an axle counter to verify the occupation or clearance of block section and indicated on Block Panel.
- 6.3 It is not possible to take the Last Stop Signal to 'OFF' unless LINE CLEAR has been obtained from station in advance.
- 6.4 It is not possible to obtain LINE CLEAR unless block section and an adequate distance beyond first stop signal of station in advance is clear of trains.
- 6.5 The Last Stop Signal assume 'ON' aspect automatically on entry of train into block section and when so replaced, is maintained in its 'ON' position till a fresh LINE CLEAR is obtained on block panel.
- 6.6 Block section show automatically Train on Line on panel when train enters into the block section on line clear.
- 6.7 Train entry/exit buzzer to/ from block section are provided and to be acknowledged.
- 6.8 Block section automatically closes on complete arrival of train at the receiving station.
- 6.9 A control to prevent the station in rear to take LINE CLEAR on its Block Panel without taking consent of receiving station.
- 6.10 A control to cancel the LINE CLEAR, already taken by station in rear.
- 6.11 It is possible to close the block section only, if no train has entered the Block Section for at least 120 seconds after application of cancellation as per clause 6.10 above with a co-operation from station in rear.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 21 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

7.0 Description of Block Panel for *Single Line*.

7.1 SM's Block Panel is provided with following **KEYS** for various functions.

- 7.1.1 SM key SM/ASM/Switchman's control key.
The key when out prevent following operations:
- Transmission of BELL code
 - Transmission of IS LINE CLEAR inquiry request
 - Cancellation of LINE CLEAR
- 7.1.2 Shunt release key (SHK) Shunt Release Key (normally OUT).
The following operation is possible when IN,
- To take out SHIJNT KEY from electric key transmitter (EKT), which serves as tangible authority for Driver to shunt beyond Last Stop Signal up to First Stop Signal.
 - The following operations are not possible when IN;
 - To take LINE CLEAR.
 - Other side station to take LINE CLEAR.
 - Closing of block.
 - To take Last Stop Signal to "OFF".
- 7.1.3 SM's Back Cover lock Key To open or lock the back cover by SM/ASM/Switchman, when required by signal staff for maintenance or repairs.
- 7.1.4 Maintainer's Back cover lock key To open or lock the back cover by authorised signal staff, for maintenance or repairs, provided SM's back cover lock key as per 7.1.3 is also applied.

7.2 SM's Block Panel is provided with following **Push Buttons (non-locking type)**.

7.2.1	BELL button(Black in colour)	To transmit BELL code to station at other end of block section. To take LINE CLEAR, when pressed along with TRAIN GOING TO button. To cancel LINE CLEAR, when pressed along with CANCEL button.
7.2.2	TRAIN GOING TO Button (Red in colour)	To transmit IS LINE CLEAR inquiry to station at other end to take LINE CLEAR. It is used in conjunction with BELL button at train sending station to light up TRAIN COMING FROM (GREEN) indication on Block Panel of other end station, which in turn automatically grants LINE CLEAR to light up and TRAIN GOING TO (GREEN) indication on Block Panel of former.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 22 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

7.2.3	ACKN button (Black in Colour)	A button is provided To silence the SECTION buzzer on occupation or clearance of block section.
7.2.4	Cancel Co-op Button (Green in colour)	To give co-operation from sending station to cancel the line clear at receiving station.
7.2.5	CANCEL Button (Yellow in colour)	To Cancel Line Clear It is used in conjunction with BELL button at train receiving Station under following conditions: a) Train has not entered the block section and Line clear cancellation has to be done. b) Complete train has been pushed back at train sending station.
7.3	Cancellation Counter:	To register the cancellation of Line Clear.
7.4	Shunt Key of EKT	
7.4.1		An auxiliary EKT is provided with SM's Block Panel to serve as SHUNTING Authority.
7.4.2		The Key of this transmitter is normally 'IN' and used as tangible authority given to Driver of a train to perform shunting upto opposing First Stop Signal (FSS).
7.4.3		Released when SHUNT RELEASE KEY of Block Panel is turned to 'IN'.
8.0	Description of Block Panel for <i>Double Line</i>	
8.1	SM's Block Panel is provided with following KEYS for various functions	
8.1.1	SM key	SM/ASM/Switchman's control key
		The Key, when out, prevents following operations:
		a) Transmission of BELL code
		b) Transmission of IS LINE CLEAR inquiry request
8.1.2	LCB Key	c) Cancellation of LINE CLEAR
		LINE CLEAR BLOCKING Key
		It serves the following when out:
		a) To prevent station in rear to take LINE LEAR.
8.1.3	SM's Back Cover lock Key	b) To prevent closing of Block.
		To open or lock the back cover by SM/ASM/Switchman ,when required by signal staff for maintenance or repairs.
8.1.4	Maintainer Back cover lock key	To open or lock the back cover by authorised signal staff, for maintenance or repairs, provided SM's back cover lock key as per cl.8.1.3 is also applied.
8.2	SM's Block Panel is provided with following <i>PUSH BUTTONS</i>(non – locking type)	

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 23 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

8.2.1	BELL button (Black in colour)	<ul style="list-style-type: none"> To transmit BELL codes to station at other end of Block section.
		<ul style="list-style-type: none"> To take LINE CLEAR, when pressed along with TRAIN GOING TO button.
		<ul style="list-style-type: none"> To cancel LINE CLEAR, when pressed along with CANCEL button.
8.2.2	TRAIN GOING TO Button (Red in colour)	To transmit IS LINE CLEAR inquiry to station in advance for taking LINE CLEAR. It is used in conjunction with BELL button at train sending station to light up TRAIN COMING FROM (GREEN) indication on Block Panel of receiving station, which in turn automatically grants LINE CLEAR to light up and TRAIN GOING TO (GREEN) indication on Block Panel of sending station.
8.2.3	ACKN button(s) (Black in colour)	Two such buttons are provided, one each for dispatch line and receive line. <ul style="list-style-type: none"> To silence the SECTION buzzer on occupation or clearance of block section.
8.2.4	Cancel Co-op Button (Green in colour)	To give co-operation from sending station to cancel the line clear at receiving station.
8.2.5	CANCEL Button (Yellow in colour)	It is used in conjunction with BELL button at train receiving. Station under following conditions: <ul style="list-style-type: none"> a) Train has not entered the block section and Line clear cancellation has to be done. b) Complete train has been pushed back at train sending station.
8.3	Cancellation Counter	a) To register cancellation of line clear.

9.0 Method of Signaling Trains from Block Station to Block Station for *Single Line*

- a) SM of the station intending to send a train from his station has to obtain verbal consent from station at other end before taking LINE CLEAR on its Block Panel.
- b) Before a request for IS LINE CLEAR is sent to station at other end, SM shall ensure the following on its Block Panel:
- i) LINE CLOSED indication YELLOW &
 - ii) LINE FREE indication GREEN &
 - iii) SNK indication YELLOW &
 - iv) SNOEK indication YELLOW &
 - v) SHUNT KEY indication GREEN
- c) The station at other end while granting his consent shall ensure the following on its Block Panel:

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 24 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

- i) LINE CLOSED indication YELLOW &
- ii) LINE FREE indication GREEN &
- iii) SNK indication YELLOW &
- iv) SNOFK indication YELLOW &

SHUNT KEY indication GREEN

- d) Thereafter SM of sending station presses BELL & TRAIN GOING TO buttons.
- e) The directional arrowhead, TRAIN GOING TO/ COMING FROM lights up green at sending/receiving station respectively.
- f) SM of sending station releases BELL & TRAIN GOING TO buttons on TRAIN GOING TO green indication.
- g) The sending station SM, after obtaining LINE CLEAR on its Block Panel, can send a train into Block Section by taking the LSS to 'OFF'. On entry of train into section, TRAIN ON LINE lights up at both the stations near arrowhead indication. The TRAIN GOING TO / TRAIN COMING FROM Arrow Head Indications turns RED in respective stations. SECTION buzzer sounds at both the stations along with ACKN indicator near ACKN button. Pressing of ACKN will turn off the buzzer and ACKN indicator.
- h) The train is received at receiving station on proper reception signals. On complete arrival of train, TRAIN COMING FROM indicator changes to FLASHING GREEN & LINE FREE indicator turns to GREEN at both the stations. TRAIN GONG TO /TRAIN COMING FROM indicator continues FLASHING GREEN at sending / receiving station respectively if reception & departure signals and their controls are not at normal or SHUNT KEY of EKT is 'OUT'. In case reception & departure signals and their controls are at normal & SHUNT KEY of EKT is 'IN' at sending/ receiving station. TRAIN GOING TO/TRAIN COMING FROM turns off and LINE CLOSED indicator lights up YELLOW.

9.1 Following is the sequence of operations of signalling a train between two stations:

The block section being clear and the 'LINE CLOSED' indication being displayed on Block Panel at both the stations. The action is taken by sending stations SM as under:

	Sending Station		Receiving Station
1.	SM ensures LINE CLOSED indication YELLOW, SNK indication YELLOW, SNOEK indication YELLOW, LINE FREE indication GREEN SM inserts SM key & turns to IN. a) SM sends 'Call Attention'	2.	SM inserts SM key & turns to IN SM acknowledges the 'Call Attention' signal by pressing BELL button.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 25 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

	signal to receiving station by pressing BELL button.		
3.	SM sends 'Attend Telephone' signal pressing BELL button.	4.	SM acknowledges by pressing BELL button and attends telephone.
5.	SM attends telephone and advises station at other end about the intended movement of the train on telephone & asks for LINE CLEAR after prescribed BELL code.	6.	a) Exchanges information regarding train movement and ensures LINE CLOSED indication YELLOW, SNK indication YELLOW, SNOEK indication YELLOW, LINE FREE indication GREEN & SHUNT KEY indication GREEN & b) Grants verbal LINE CLEAR.
7.	SM presses BELL & TRAIN GOING TO buttons until 'TRAIN GOING TO' 'arrowhead' indication lights up GREEN. (If aforesaid indicator does not appear after 3 seconds (approx.) of pressing the buttons, SM releases the buttons and rechecks conditions at his station and asks station at other end to recheck the conditions for grant of LINE CLEAR.	8.	'LINE CLOSED' indicator turns off and 'TRAIN COMING FROM' arrowhead indication lights up GREEN.
9.	'LINE CLOSED' indicator turns off. 'TRAIN GOING TO' arrowhead indication lights up GREEN. Releases BELL & TRAIN GOING TO buttons.		

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 26 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

10	<p>Takes LSS to 'OFF'. Train enters the Block Section. LSS replaces to 'ON'. LINE FREE indicator turns to RED.</p> <p>SECTION buzzer starts ringing & 'TRAIN GOING TO' arrowhead indication turns RED. ACKN indicator lights up.</p> <p>Acknowledges the buzzer by pressing ACKN button. ACKN indicator turns off. Puts back the LSS controls to Normal. Ensures SNK lights up YELLOW.</p>	11	<p>LINE FREE Indicator turns to RED</p> <p>SECTION buzzer starts ringing & 'TRAIN COMING FROM' arrowhead indication turns RED. ACKN indicator lights up.</p> <p>Acknowledges the buzzer by pressing ACKN button. ACKN indicator turns off.</p> <p>SNOEK lights up YELLOW</p> <p>Takes reception signal 'OFF' to receive the train. Train passes Home Signal. Home Signal replaces to 'ON'. Train clears the Block Section.</p>
13	<p>SECTION buzzer starts ringing. ACKN indicator lights up. LINE FREE indicator turns to GREEN 'TRAIN GOING TO' arrowhead indication turns to FLASHING GREEN. Acknowledges the buzzer by pressing ACKN button. ACKN indicator turns off.</p>	12	<p>SECTION buzzer starts ringing. ACKN indicator light up & LINE FREE indicator turns to GREEN. 'TRAIN COMING FROM' arrowhead indication turns to FLASHING GREEN.</p> <p>Acknowledges the buzzer by pressing ACKN button. ACKN indicator turns off.</p>
15	<p>SNOEK lights up yellow. 'TRAIN GOING TO' arrowhead indication turns off. 'LINE CLOSED' indicator lights up.</p>	14	<p>Replaces all controls pertaining to reception of train to Normal. SNK lights up YELLOW. 'TRAIN COMING FROM' arrowhead indication turns off.</p> <p>'LINE CLOSED' Indicator lights up.</p>

9.2 REFUSAL TO 'LINE CLEAR INQUIRY'

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 27 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

When a block section is blocked by the presence of a train in the section or train parting or shunting or opening of level crossing in mid section or for any other reason, the SHUNT key of EKT shall be taken out and kept in safe custody.

If the block station at other end refuses the IS LINE CLEAR enquiry signal, no train shall be allowed to leave until a fresh IS LINE CLEAR enquiry signal has been given to block station at other end and accepted.

On removal of obstruction, the Shunt Key of EKT shall be inserted and turned to IN position and the Shunt Release Key should be taken OUT. SM shall immediately inform SM of other end about the fact, so as to enable him to send a fresh IS LINE CLEAR signal.

9.3 CLOSING OF BLOCK AFTER A PUSH BACK OPERATION

After a train has been pushed back at the sending station, the sending station advises the receiving station. The receiving station can close the section by pressing BELL and CANCEL button after getting cooperation from the other end station.

9.4 Method of Push Back operation

SENDING STATION		RECEIVING STATION	
1.	Train clears the Block Section. LINE FREE indicator turns GREEN. SECTION buzzer starts ringing. ACKN indicator lights up. 'TRAIN GOING TO' arrowhead indication turns to FLASHING GREEN. Acknowledges the buzzer by pressing ACKN button. ACKN indicator turns off.	2.	Train clears the Block Section. LINE FREE indicator turns GREEN. SECTION buzzer starts ringing. ACKN indicator lights up. 'TRAIN COMING FROM' arrowhead indication turns to FLASHING GREEN. Acknowledges the buzzer by pressing ACKN button. ACKN indicator turns off.
3	Advises receiving end station SM about cancellation on telephone prescribed BELL code.	4.	Agrees to request, ensures SNK indicator YELLOW, SNOEK indicator YELLOW, SHUNT KEY indicator GREEN and Gives consent on telephone after

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 28 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

			prescribed BELL code
5	After verbal consent from other end SME ensure SNK indication YELLOW,SNOEK indication YELLOW,SHUNT KEY indication GREEN Presses CANCEL CO-OP button and releases on receipt of BELL code.	6	CO-OP to light up YELLOW. Presses BELL & CANCEL button with SM key IN. CANCEL COUNTER increments. CANCEL indication lights up FLASHING YELLOW & continues flashing for 120 seconds.
8.	TRAIN GOING TO arrowhead indication turns off. LINE CLOSED indication lights up.	7.	On expiry of 120 seconds, TRAIN COMING FROM arrowhead indication and CANCEL indication turns off. 'LINE CLOSED' indication lights up.

9.5 BLOCK BACK

The SM, who intends to Block Back the line, shall inform the SM of station at other end on telephone for permission to Block Back, who will acknowledge the message and grant permission supported by a private number. SM takes SHUNT key of EKT OUT and keeps in safe custody. The SM will then issue necessary authority to driver of train to perform shunting in Block Section.

On completion of shunting, section clear message will be sent to SM of station at other end on telephone about obstruction removed supported by a private number, who in turn will acknowledge the same supported by a private number. Thereafter SM will insert SHUNT key of EKT and turn to 'IN' position and takes out the shunt release key.

All the entries in Train Signal Register (TSR) for this operation should be make in RED ink. The reasons for Block Back shall be recorded in remarks column against each entry.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 29 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

	Station in rear		Station intending BLOCK BACK
2.	Block Panel displays; LINE CLOSED - YELLOW LINE FREE - GREEN SNOEK - YELLOW SHUNT KEY - GREEN	1.	Block Panel displays; LINE CLOSED - YELLOW LINE FREE - GREEN SNOEK - YELLOW SHUNT KEY - GREEN
4.	Acknowledges call attention / attend telephone signal.	3.	Inserts SM key & turns, Gives call attention / attend telephone signal.
6.	Attends telephone.	5.	Attends telephone.
8.	Acknowledges & gives consent by private number.	7.	Inform intention to perform shunting in Block Section.
10.	SNOEK turns off.	9.	Takes Shunt Key 'OUT' from EKT and keeps in safe custody. Issue necessary authority to driver of train to perform shunting in Block Section. SHUNT KEY indication turns to RED.
12.	On entry of train in Block Section, SECTION buzzer starts ringing & ACKN indication lights up.	11.	On entry of train in Block Section, SECTION buzzer starts ringing & ACKN indication lights up.
	LINE FREE indication turns to RED. LINE CLOSED indication turns off.		LINE FREE indication turns to RED. LINE CLOSED indication turns off.
	Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.		Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.
14.	On clearing of Block Section. SECTION buzzer starts ringing & LINE CLOSED indication lights up. ACKN indication lights up.	13.	On clearing of Block Section. SECTION buzzer starts ringing & LINE CLOSED indication lights up. ACKN indication lights up.
	LINE FREE indication turns to GREEN. LINE CLOSED indication lights up YELLOW.		LINE FREE indicator turns to GREEN. LINE CLOSED indication lights up YELLOW.
	Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.		Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.
16.	Acknowledges call attention/ attend telephone signal.	15.	On completion of shunting, SM verifies the line between opposite STARTER (if any)/ Shunt signal or Stop Board/ Fouling mark and FSS, free from any vehicle. Inserts SM key & turns, Gives call attention / attend telephone signal.
18.	Attends telephone.	17.	Attends telephone.
20.	Acknowledges supported by a private number.	19.	Inform shunting is completed supported by a private number.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 30 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

22.	SNOEK lights up YELLOW.	21.	Inserts SHUNT KEY of EKT & turns to 'IN'. SHUNT KEY indication turns to GREEN.
-----	-------------------------	-----	---

9.6 SHUNTING OF TRAIN

Where shunt signals are not provided for shunting on line leading towards Block section, the driver of shunting train shall be given shunting order at the foot of STARTER SIGNAL /STOP BOARD/FOULING MARK before allowing any shunting. While shunting, the LAST STOP SIGNAL should be kept at ON.

9.6.1 SHUNTING UPTO LAST STOP SIGNAL

SHUNT KEY of EKT shall be taken OUT and kept in safe custody. The driver of shunting train shall be given shunting order to shunt up to LSS. On completion of shunting, the line between STARTER/ Shunt Signal/ Stop Board/ Fouling mark and LSS should be checked free from any vehicle. SHUNT KEY of EKT shall be inserted and turned to IN position.

When an IS LINE CLEAR enquiry is received from Block Station at other end of block section, permission for shunting up to LSS shall be granted only after compliance of GR 8.09 & 8.10 and as permitted by Station Working Rules (SWR).

9.6.2 SHUNTING BEHIND A TRAIN

Shunting behind a train should be performed with message to station at other end. SM shall take out SHUNT KEY of EKT after entry of train beyond LSS and hand over to Driver of shunting train along with shunting order.

On completion of shunting, Driver of shunting train hands over SHUNT KEY of EKT to SM. SM ensures clearance of line between STARTER/ Shunt Signal/ Stop Board / Fouling mark and LSS from any vehicle. The message regarding completion of shunting shall be sent to station at other end.

SM inserts SHUNT KEY of EKT and turns to IN position.

In case train arrives at station at other end before completion of shunting, TRAIN GOING TO/ TRAIN COMING FROM arrowhead indication will remain at RED, till shunting train clears the section. During such period line shall be BLOCKED BACK as procedure laid down in the specification at Cl. 9.5.

9.6.3 Shunting in face of an approaching Train

9.6.3.1 Shunting in face of an approaching train, towards LSS, where permitted in SWR by special instructions, can be performed. The driver of shunting train shall be given shunting order to shunt up to LSS. On completion of shunting, the line between STARTER/ SHUNT SIGNAL/ STOP BOARD / FOULING MARK and FIRST STOP SIGNAL should be checked free from any vehicle.

9.6.3.2 Shunting in face of an approaching train, beyond LSS and up to FSS can be performed only, when approaching train has been brought to a stop at FSS of the

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 31 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

station. Whenever such shunting is to be performed, SM key shall be taken OUT and kept in safe custody. The driver of shunting train shall be given shunting order to shunt up to FSS. On completion of shunting, the line between STARTER/ SHUNT SIGNAL/ STOP BOARD / FOULING MARK AND FSS SIGNAL should be checked free from any vehicle and only then SM key shall be inserted and turned to IN position.

9.6.4 Shunting of Train beyond LSS in cases other than shunting behind a train or shunting in face of approaching train

The shunting should be done under protection of Block Back only.

9.7 BLOCK FAILURES AND ACTION TO BE TAKEN:

The block failures can be categorised into the following:

9.7.1 Failure of BLOCK PANEL:

Block panel should be considered to be defective and should not be restored for normal working until tested by competent signal staff & certified fit by them for use after the under-mentioned cases except for the case of Communication Link Failure (steady yellow indication). After the Communication Link Failure indication becomes flickering again block panel operation can be restored.

	TYPE OF FAILURE	ACTION TO BE TAKEN
1.	When no indication of any sort, at all appears on the block panel or;	For case 1-11, Block Panel should be treated as defective block working suspended & trains should be dealt with by taking LINE CLEAR on the electrical communication equipment provided and by provisions of GR 14.13 & SR there under, if any.
2.	When the Bell Code signals are received indistinctly or;	
3.	Any damage is seen or reported to block panel or;	
4.	When no train has entered into the block section but the 'LINE FREE/OCCUPIED' indicator changes to RED and this indication persists even after Resetting of Axle counter has been tried or;	

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 32 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

5.	When 'TRAIN GOING TO' or 'TRAIN COMING FROM' arrowhead indications does not appear by appropriate action though condition for asking 'LINE CLEAR' and granting permission to approach are available and LINE CLOSED'YELLOW' is maintained or;	
6.	When a train arrives at the receiving station or pushes back at sending station, but Block Panel still shows 'TRAIN COMING FROM & TRAIN GOING TO' RED arrowhead indication or;	
7.	TRAIN GOING TO or TRAIN COMING FROM arrowhead indication does not turn to RED to give TRAIN ON LINE on the entry of train into Block Section at either of the stations or;	
8.	When a train has arrived at the receiving station but the Block Panel shows FLASHING GREEN indication even after ensuring SNK, SNOEK & SHUNT key indicator GREEN or;	
9.	When, after a Line Clear cancellation, CANCEL indicator does not light up FLASHING YELLOW or lights up steady YELLOW after appropriate actions or;	
10.	When UFSBI/Mux Fail indication appears.	
11.	When Communication Link Fail indication becomes stead yellow.	
12.	When LSS can not be kept at 'ON' during its suspension /disconnection. or;	In addition to action taken for case1-11, all efforts should be made to keep the LSS at ON position. If it is not possible, then a competent railway servant should be deputed with RED hand signal at the foot of the LSS to warn the drivers of approaching trains.
13.	When LSS of the station does not go back to 'ON' position on the entry of a train into the Block Section	In addition, all trains in the relevant direction should be stopped at Home signal and after ensuring that they have come to a stop, the Home signal should be cleared to caution aspect only.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 33 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

		To dispatch a train, STARTER signal should not be taken OFF until issue of relevant authority to pass LSS & Caution order should also be issued to the driver about the defect of LSS.
14.	Total failure of communication during which train shall be worked as per extent rules in force on the Railway	In addition to action taken for case 1-13, the trains should be dealt with under the extent rules as laid down in GR 14.13 & SR there under

9.7.2 Failure of LSS & Action to be taken

	Cause of failure of the LSS	Action to be taken
1.	When it cannot be taken OFF even though LINECLEAR has been obtained; or;	The LSS should be considered to have failed & failure shall be informed to Signal staff immediately. The LINE CLEAR shall be obtained on the BLOCK PANEL & Line Clear ticket/Paper line clear as prevalent on railway shall be issued to driver of train
2.	When it can be cleared without obtaining LINECLEAR; or;	The LSS should be considered to have failed & failure shall be informed to Signal staff immediately and follow Cl. 9.7.1.13-9.7.1.14
3.	It does not restore to ON position on entry of train into Block Section	

9.7.13Suspension of Block Working & Action to be taken

	Cause of Suspension	Action to be taken
1.	When material lorry, Rail-cum-Road vehicle, Motor trolley, Tie-tamping machines, Rail Motor/Bus or Tower wagon (4wheeler) has to run in the section.	BLOCK PANEL shall be suspended. These vehicles shall be worked on PAPER LINE CLEAR.
2.	An accident takes place in the mid section.	BLOCK PANEL shall be suspended, if any line adjacent to line controlled by it is reported to be infringing, till the infringement exists. LSS shall be treated as INOPERATIVE & FAILED.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 34 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

3.	When any part of Block Panel is opened or removed for repairs under duty accepted disconnection notice.	BLOCK PANEL shall be suspended. LSS shall be treated as INOPERATIVE & FAILED.
4.	When LSS of the station has been taken by Signal staff for repairs.	LSS shall be treated as INOPERATIVE & FAILED.
5.	During Block FORWARD.	LSS shall be treated as INOPERATIVE & FAILED.

When the cause of suspension of BLOCK PANEL and/or LSS is removed, SM shall restore the normal working of BLOCK PANEL / LSS, as the case may be.

9.8 Technical details of Block equipment

9.8.1 DESCRIPTION OF CIRCUIT WITH UFSBI:

9.8.2 To dispatch a train

At Sending Station	At Receiving Station
The following relays are normally energised in LINE CLOSED ASGNCR↑, AZTR↑. BTSR↑, ASGNCP↑, SHKR ↑, HSGNCR↑ The following indications are ON LINE CLOSED – Yellow, SNK-Yellow, SNOEK-Yellow, LINE FREE - green, Shunt Key Green, Last Stop Signal – Red	The following relays are normally energised in LINE CLOSED BTSR↑, HSATPR↑. HSBTP↑, HSGNCR↑, AZTR↑, ASGNCR↑, ASGNCP↑, SHKR↑ The following indications are ON LINE CLOSED -Yellow, SNK-Yellow, SNOEK-Yellow, LINE FREE-Green, Shunt Key Green, Last Stop Signal – Red

1	<ul style="list-style-type: none"> a) The SM at sending station inserts its SM key and turns to IN position. SM Key - Green. b) Presses BELL button. BPNR↑ and TRAIN GOING TO button. TGTNR↑. c) TGTXR relay picks up, provided the conditions for taking LINE CLEAR exist and transmits LINE CLEAR enquiry. d) Waits for "TRAIN GOING TO" indication to light up GREEN. 	2	<ul style="list-style-type: none"> a) TCFXR picks up. b) TCFR operates and latches provided the conditions for granting LINE CLEAR exist. c) 'LINE CLOSED' turns 'OFF'. e) TCFK (G) "TRAIN COMING FROM" indication GREEN turns 'ON'. f) Sends LINE CLEAR granted code.
---	--	---	---

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 35 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

3	<p>a) TGTyr picks up.</p> <p>b) TGTZR↓.</p> <p>c) TGTR picks up and latches and TGTXR↓.</p> <p>d) "LINE CLOSED" indication turns 'OFF'.</p> <p>e) TGTK (G) "TRAIN GONG TO" indication lights up GREEN.</p> <p>f) Releases BELL and TRAIN GOING TO buttons. BPNR↓ TGtNR↓.</p> <p>g) Advance Starter signal can be taken 'OFF' by SM control. ASGNCR↓ ASCR↑, SNK OFF, LSS -Green.</p>	4	<p>TCFXR↓.</p> <p>ASGNCPR↓, SNOKE turns OFF.</p>
5	<p>a) Train enters Block Section AZTR↓, ASCR↓, BTSR↓.</p> <p>b) LINE FREE indication turns RED.</p> <p>c) TGTK (G) indication changes to TGTK(R). LSS - Red.</p> <p>d) SECTION Buzzer sounds with indication near ACKN button.</p> <p>e) SM presses ACKN to silence the SECTION buzzer and turn 'OFF' aforesaid indication.</p> <p>f) TGTyr↓.</p> <p>g) Restores all Signal controls to Normal. ASGNCR↑, SNK-yellow</p> <p>h) Train in section.</p>	6	<p>a) Train enters Block Section.</p> <p>b) AZTR↓, BTSR↓.</p> <p>c) LINE FREE indication turns RED.</p> <p>d) TCFK (G) indication changes to TCFK(R).</p> <p>e) SECTION Buzzer sounds with indication near ACKN button.</p> <p>f) SM presses ACKN to silence the SECTION buzzer and turn 'OFF' aforesaid indication. ASGNCPR↓, SNOKE- YELLOW. Train in section.</p>

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 36 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

		7	<p>a) Train is received by reversing the Home Signal Lever, (R) HSGNCR↓, SNK- 'OFF'.</p> <p>b) Train occupies HSAT, (R) HSATPR↓, TAR1↑ and sticks.</p> <p>c) Train occupies HSBT, HSBTPR↓ and clears HSAT, HSATPR↑ TAR2↑ and sticks.</p> <p>d) TAR1↓.</p> <p>e) AZTR↑, Line Free-Green.</p> <p>f) SECTION Buzzer sounds with indication near ACKN button.</p> <p>g) SM presses ACKN to silence the SECTION buzzer and turn 'OFF' aforesaid indication.</p> <p>h) FR1 and FR2 operate to give flashing indications.</p> <p>i) TCFK(R) changes to TCFK (flashing green).</p>
8.	<p>a) AZTR↑.</p> <p>b) LINE FREE indication turns GREEN.</p> <p>c) FR1 and FR2 operate to give flashing indications.</p> <p>d) TGTK(R) changes to TGTK (flashing green) .</p>	9.	<p>a) Normalises all controls to pick up HSGNCR</p> <p>b) Waits for TGTZR to pick up and on its pick up, de-latches (R)TCFR.</p> <p>c) B TSR↑.</p> <p>d) LINE CLOSED indication turns ON.</p> <p>e) TCFK (flashing green) turns OFF.</p>
10	<p>a) TGTR↓, TGTZR↑.</p> <p>b) LINE CLOSED indication turns ON.</p> <p>c) TRAIN GOING TO (Flashing Green) indication turns OFF.</p>		

10.0 Method of Signaling Trains from Block Station to Block Station for *Double Line*.

- a) SM of the station intending to send a train from his station has to obtain verbal consent from station in advance before taking LINE CLEAR on its Block Panel.
- b) Before a request for IS LINE CLEAR is sent to station in advance. SM of sending station shall ensure the following near TRAIN GOING TO arrowhead on its Block Panel:
 - i) LINE CLOSED indication YELLOW &

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 37 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

- ii) LINE FREE indication GREEN &
- iii) SNK indication YELLOW.
- c) The station in advance while granting his verbal consent shall ensure the following near TRAIN COMING FROM arrowhead on its Block Panel:
 - i) LINE CLOSED indication YELLOW &
 - ii) LINE FREE indication GREEN &
 - iii) SNK indication YELLOW &
 - iv) SNOEK indication YELLOW

Then inserts and turns LCB key.
- d) Thereafter SM of sending station presses BELL & TRAIN GOING TO buttons.
- e) The arrowhead, TRAIN GOING TO/ TRAIN COMING FROM lights up green at sending/receiving station respectively.
- f) SM of sending station releases BELL & TRAIN GOING TO buttons on getting TRAIN GOING TO green indication.
- g) The sending station SM after obtaining LINE CLEAR on its Block Panel can send the train into Block Section by taking the LSS to 'OFF'. On entry of train into section, TRAIN ON LINE lights up RED at both the stations in arrowhead indication. SECTION buzzer sounds at both the stations along with ACKN indication near respective ACKN button. Pressing of ACKN button of concerned line (Despatch/Receive) will turn off the buzzer and ACKN indication.
- h) The train is received at receiving station on proper reception signals. On complete arrival of train, TRAIN GOING TO /TRAIN COMING FROM arrowhead indication turns to FLASHING GREEN & LINE FREE indication turns to GREEN at both the stations. TRAIN GOING TO /TRAIN COMING FROM arrowhead indication continues FLASHING GREEN at sending / receiving station respectively till reception & departure signals and their controls are not at normal or LCB Key is not 'IN'. In case reception & departure signals and their controls are at normal & LCB key is IN, TRAIN GOING TO /TRAIN COMING FROM arrowhead indication turns off and LINE CLOSED indication lights up YELLOW.

10.1 Following is the sequence of operations of signalling a train between two stations:

The block section being clear and the 'LINE CLOSED' indication being displayed on Block Panel at both the stations. The action is taken by sending stations SM as under:

	Sending Station		Receiving Station

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 38 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

1.	SM ensures LINE CLOSED indication YELLOW, SNK indication YELLOW, LINE FREE indication GREEN. a) SM inserts SM key & turns to IN. b) SM sends 'Call Attention' signal to receiving station by pressing BELL button.	2.	SM acknowledges the 'Call Attention' signal by pressing BELL button.
3.	SM sends 'Attend Telephone' signal by pressing BELL button.	4.	SM acknowledges by pressing BELL button and attends telephone.
5.	SM attends telephone and advises station in advance about the intended movement of the train on telephone & asks for LINE CLEAR.	6.	a) Exchanges information regarding train movement and ensures LINE CLOSED indication YELLOW, SNK indication YELLOW, LINE FREE indicator GREEN & LCB key IN & b) Grants verbal LINE CLEAR.
7.	SM presses BELL & TRAIN GOING TO buttons until 'TRAIN GOING TO' arrowhead indication lights up GREEN. (If aforesaid indication does not appear after 3 seconds (approx.) of pressing the buttons, SM releases the buttons and rechecks conditions at his station and asks station in advance to recheck the conditions for grant of LINE CLEAR.)	8.	'LINE CLOSED' indication turns off and 'TRAIN COMING FROM' arrowhead indication lights up GREEN.
9.	'LINE CLOSED' indication turns off. 'TRAIN GOING TO' arrowhead indication lights up GREEN. Releases BELL & TRAIN GOING TO buttons.		

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 39 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

10	<p>Takes LSS to 'OFF'</p> <p>Train enters the Block Section. LSS replaces to 'ON'. LINE OCCUPIED indication lights up RED.</p> <p>SECTION buzzer starts ringing & 'TRAIN GOING TO' Arrow Head Indication turns RED. ACKN indication lights up.</p> <p>Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off. Puts back the LSS controls to Normal. Ensures SNK lights up YELLOW.</p>	11	<p>LINE OCCUPIED indication lights up RED.</p> <p>SECTION buzzer starts ringing & 'TRAIN COMING FROM' Arrow Head Indication turns RED. ACKN indication lights up.</p> <p>Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off. SNOEK lights up YELLOW. Takes reception signal(s) 'OFF' to receive the train.</p> <p>Train passes Home Signal. Signal replaces to 'ON'.</p> <p>Train clears the Block Section including Block overlap.</p>
13	<p>SECTION buzzer starts ringing. ACKN indication lights up YELLOW. LINE FREE indication turns to GREEN. 'TRAIN GOING TO' indication turns FLASHING GREEN.</p> <p>Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.</p>	12	<p>SECTION buzzer starts ringing. ACKN indication lights up YELLOW. LINE FREE indication turns to GREEN. 'TRAIN COMING FROM' Arrow Head Indication turns FLASHING GREEN.</p> <p>Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.</p>
15	<p>'TRAIN GOING TO' Arrow Head Indication turns off.</p> <p>'LINE CLOSED' indication lights up.</p>	14	<p>Replaces all controls pertaining to reception of train to Normal.</p> <p>SNK lights up YELLOW. 'TRAIN COMING FROM' Arrow Head Indication turns off. 'LINE CLOSED' indication lights up.</p>

10.2 REFUSAL TO 'LINE CLEAR ENQUIRY'

When the line is being blocked by the presence of a train in the section or train parting or shunting or opening of level crossing in mid section or for any other reason, the LCB key shall be taken out and kept in safe custody.

On removal of obstruction, SM shall immediately inform SM of station in rear about the fact and put LCB Key IN, so as to enable him to send a fresh LINE CLEAR ENQUIRY.

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 40 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

10.3 CLOSING OF BLOCK AFTER A PUSH BACK OPERATION

After a train has been pushed back at the sending station, the sending station advises the receiving station. The receiving station can close the section by pressing BELL & CANCEL button after getting cooperation from sending station.

10.4 Method of Push Back operation

SENDING STATION		RECEIVING STATION	
1.	Train clears the Block Section. LINE FREE indication turns GREEN. SECTION buzzer starts ringing. ACKN indication lights up. 'TRAIN GOING TO' arrowhead indication turns to FLASHING GREEN. Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off. Ensure SNK indication YELLOW.	2.	Train clears the Block Section. LINE FREE indication turns GREEN. SECTION buzzer starts ringing. ACKN indication lights up. 'TRAIN COMING FROM' arrowhead indication turns to FLASHING GREEN. Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.
3.	Advises other end station SM to close the block, on telephone after prescribed BELL code.	4.	On request from sending station SM about closing of block on telephone after prescribed BELL code. Ensures SNK indication YELLOW.
5.	Gives co-operation to other end station for cancellation.	6.	Co-operation indication light up yellow. BELL and CANCEL button pressed, Released with SM key IN, Cancel counter increments CANCEL indication lights up FLASHING YELLOW and continues flashing for 120 seconds.
8.	TRAIN GOING TO Arrow Head Indication turns off. LINE CLOSED indication lights up.	7.	On expiry of 120 seconds, TRAIN COMING FROM arrowhead indication & cancel indications turn off. LINE CLOSED indication lights up.

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 41 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

10.5 BLOCK BACK

The SM, who intends to Block Back the line, shall inform the SM of station in rear on telephone for permission to Block Back, who will acknowledge the message and grant permission supported by a private number. SM who intends to block back takes LCB key OUT and keeps in safe custody. The SM will then issue necessary authority to driver of train to perform shunting in Block Section.

On completion of shunting, section clear message will be sent to SM of station in rear on telephone about obstruction removed supported by a private number, who in turn will acknowledge the same supported by a private number. Thereafter SM will insert LCB Key and turn to IN position.

All the entries in Train Signal Register (TSR) for this operation should be make in RED ink. The reasons for Block Back shall be recorded in remarks column against each entry.

	Station in rear		Station intending BLOCK BACK
2.	Block Panel displays; LINE CLOSED - YELLOW LINE FREE - GREEN SNK - YELLOW	1.	Block Panel displays; LINE CLOSED - YELLOW LINE FREE - GREEN SNOEK - YELLOW
4.	Acknowledges call attention /attend telephone signal.	3.	Inserts SM key and turns, Gives call attention /attend telephone signal.
6.	Attends telephone.	5.	Attends telephone.
8.	Acknowledges and gives consent by private number.	7.	Inform intention to block back for shunting in Block Section.
		9.	The LCB is taken out and kept in safe custody. Issue necessary authority to driver of train to perform shunting in Block Section.
11.	On entry of train in Block Section, SECTION buzzer starts ringing and LINE CLOSED indication turns off. ACKN indication lights up. LINE OCCUPIED indication lights up RED. Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.	10.	On entry of train in Block Section, SECTION buzzer starts ringing and LINE CLOSED indication turns off. ACKN indication lights up. LINE OCCUPIED indication lights up RED. Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 42 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

13.	On clearing of Block Section. SECTION buzzer starts ringing and LINE CLOSED indication lights up. ACKN indication lights up. LINE FREE indication turns to GREEN. Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.	12	On clearing of Block Section. SECTION buzzer starts ringing and LINE CLOSED indication lights up. ACKN indication lights up. LINE FREE indication turns to GREEN. Acknowledge the buzzer by pressing ACKN button. ACKN indication turns off.
15.	Acknowledges call attention /attend telephone signal.	14	On completion of shunting, SM verifies the line between opposite STARTER (if any) / Shunt signal or Block section Limit Board/ Stop Board/fouling mark and FIRST STOP SIGNAL, free from any vehicle.
17.	Attends telephone.	16	Attends telephone.
19.	Acknowledges supported by a private number.	18	Informs shunting is completed supported by a private number.
		20	Inserts LCB and turns in.

10.6 BLOCK FORWARD

The SM, who intends to Block forward the line, shall inform the SM of station in advance on Telephone for permission to Block forward, who will acknowledge the message and grant permission supported by a private number. The SM of advance station takes LCB key OUT and keeps in safe custody. The SM of this station will then issue necessary authority to driver of train to perform shunting in Block Section.

On completion of shunting, message will be sent to SM of station in advance on telephone about obstruction removed supported by a private number, who in turn will acknowledge the same supported by a private number. Thereafter SM of advance station will insert LCB key and turn to IN position.

All the entries in Train Signal Register for this operation should be made in RED ink. The reasons for Block forward shall be recorded in remarks column against each entry.

	Station intending BLOCK FORWARD		Station in advance
1.	Block Panel displays; LINE CLOSED - YELLOW LINE FREE - GREEN	2.	Block Panel displays; LINE CLOSED - YELLOW LINE FREE - GREEN
3.	Inserts SM key and turns, Gives call attention /attend telephone signal.	4.	Acknowledges call attention /attend telephone signal.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 43 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

5.	Attends telephone.	6.	Attends telephone.
7.	Inform intention to perform shunting in Block Section.	8.	Acknowledges and gives consent by private number.
10.	Issue necessary authority to driver of train to perform shunting in Block Section.	9.	The LCB Key is taken out and kept in safe custody.
11.	On entry of train in Block section, SECTION buzzer starts ringing and LINE CLOSED indication turns off. ACKN indication lights up. LINE FREE indication turns to RED. Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.	12.	On entry of train in Block section, SECTION buzzer starts ringing and LINE CLOSED indication turns off. ACKN indication lights up Yellow. LINE FREE indication turns to RED. Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.
13.	On clearing of Block Section. SECTION buzzer starts ringing and LINE CLOSED indication lights up yellow. ACKN indication lights up Yellow. LINE FREE indication turns to GREEN. Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.	14.	On clearing of Block Section SECTION buzzer starts ringing and LINE CLOSED indication lights up yellow. ACKN indication lights up yellow. LINE FREE indication turns to GREEN. Acknowledges the buzzer by pressing ACKN button. ACKN indication turns off.
15.	On completion of shunting, SM verifies the line between STARTER /Shunt signal/Stop Board/fouling mark and LAST STOP SIGNAL, free from any vehicle. Inserts SM key and turn. Gives call attention to attend telephone.	16.	Acknowledges call attention to attend telephone.
18.	Attends telephone.	17.	Attends telephone.
20.	Inform shunting is completed supported by a private number.	19.	Acknowledges supported by a private number.
		21.	Inserts LCB and turn in.

10.7 SHUNTING OF TRAIN

Where shunt signals are not provided for shunting on line leading towards Block section, the driver of shunting train shall be given shunting order at the foot of STARTER SIGNAL /STOP BOARD/FOULING MARK before allowing any shunting.

10.7.1 SHUNTING OF TRAIN UP TO LAST STOP SIGNAL

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 44 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

While shunting on dispatch line, the LAST STOP SIGNAL should be kept at ON. SM Key shall be taken out. The driver of shunting train shall be given shunting order to shunt up to LAST STOP SIGNAL. On completion of shunting, the line between STARTER/Shunt Signal/Stop Board/fouling mark and LAST STOP SIGNAL should be checked free from any vehicle and only then SM key shall be inserted and turned to IN position.

10.7.2 SHUNTING BEHIND A TRAIN

Shunting behind a train should be performed with a message to station in advance. The station in advance shall take LCB Key out and keep in safe custody.

Shunting shall be performed as per 10.7.1. On completion of shunting, SM of sending station verifies the line between STARTER/Shunt Signal/Stop Board /Fouling Mark and LAST STOP SIGNAL free from any vehicle. The message regarding completion of shunting shall be sent to station in advance.

SM of station in advance inserts LCB Key and turns to IN position.

10.7.3 SHUNTING OF TRAIN BEYOND LAST STOP SIGNAL

The shunting shall be done under protection of Block Forward only.

10.7.4 SHUNTING OF TRAIN TOWARDS FIRST STOP SIGNAL

The shunting shall be done under protection of Block Back only.

10.7.5 SHUNTING OF TRAIN IN FACE OF APPROACHING TRAIN

No shunting in face of approaching train, towards receive line should be permitted, until the approaching train has been brought to a stop at first stop signal of the station. Whenever such shunting is to be performed, LCB Key shall be taken OUT and kept in safe custody. The driver of shunting train shall be given shunting order to shunt up to FIRST STOP SIGNAL. On completion of shunting, the line between STARTER/SHUNT SIGNAL/STOP BOARD/FOULING MARK AND FIRST STOP SIGNAL should be checked free from any vehicle and only then LCB key shall be inserted and turned to IN position.

10.8 BLOCK FAILURES AND ACTION TO BE TAKEN:

The block failures can be categorised into the following:

10.8.1 FAILURE OF THE BLOCK PANEL:

Block panel should be considered defective for Up and /or Down trains, as the case may be. The Block Panel should not be restored for normal working until tested by competent signal staff and certified fit by them for use after the under-mentioned cases except for the case of Communication Link Failure (steady yellow indication). After the Communication Link Failure indication becomes flickering again block panel operation can be restored.

CAUSE OF FAILURE	ACTION TO BE TAKEN
------------------	--------------------

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 45 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

<p>1. When no indication of any sort, at all appears on the block panel or;</p> <p>2. When the Bell Code signals are received indistinctly or;</p> <p>3. Any damage is seen or reported to block equipment or;</p> <p>4. When none of the indications viz. 'TRAIN COMING FROM and TRAIN GOING TO' appears on the block panel except 'LINE FREE' or;</p> <p>5. When no train has entered into the block section but the 'LINE OCCUPIED' indication lights on RED on both lines and these indication persists even after resetting of the Axle Counters have been tried. or;</p> <p>6. When a train has arrived at the receiving station but the Block Panel still shows 'TRAIN ON LINE' RED indication and persist on both lines or;</p> <p>7. When BI Fail indication comes. or;</p> <p>8. When Link Fail indication becomes steady yellow.</p> <p>9. When 'TRAIN GOING TO' or 'TRAIN COMING FROM' Arrow Head Indications do not appear by appropriate action though condition for asking 'LINE CLEAR' and granting permission to approach are available. or;</p> <p>10. TRAIN GOING TO or TRAIN COMING FROM Arrow Head Indications does not turn to RED to give TRAIN ON LINE on the entry of train into Block Section at either of the stations or;</p> <p>11. When a train has arrived at the receiving station but the Block Panel shows FLASHING GREEN/GREEN indication even after ensuing SNK</p>	<p>For case 1-9, Block Panel should be treated as defective block working suspended and trains should be dealt with by taking LINE CLEAR on the electrical communication equipment provided and by provisions of GR 14.13 and SR there under, if any.</p> <p>For case 10-12, the Block Panel should be treated as defective for respective line, Block working suspended for respective line and trains should be dealt with by taking LINE CLEAR on the electrical communication equipment provided and by provisions of GR 14.13 and SR there under, if any.</p>
---	--

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 46 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001: 2015 2008	Document No- IRS:S-105/ 2025 2012	Version: 1.0 0	Date Effective: DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

indication and LCB key IN
or;

12. When, after a cancellation, CANCEL
indication does not light up FLASHING
YELLOW or STEADY YELLOW after
appropriate actions
or;

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 47 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

<p>13. When Last Stop Signal cannot be kept at 'ON' during its suspension /disconnection.</p> <p>14. When Last Stop Signal of the station does not go back to 'ON' position on the entry of a train into the Block Section</p>	<p>In addition to action taken for case 1-12, all efforts should be made to keep the LAST STOP SIGNAL at ON position. If it is not possible, then a competent railway servant should be deputed with RED hand signal at the foot of the LAST STOP SIGNAL to warn the drivers of the approaching trains. In addition all trains in the relevant direction should be stopped at Home signal and after ensuring that they have come to a stop, the Home signal should be cleared to caution aspect only.</p> <p>The STARTER signal should not be taken OFF until the issue of relevant authority to pass the STARTER and LAST STOP SIGNAL to the driver. Caution order should also be issued to the driver about the defect of LAST STOP SIGNAL.</p>
15. Total failure of communication during which train shall be worked as per extent rules in force on the Railway	In addition to action taken for case 1-14, the trains should be dealt with under the extent rules as outlined in GR 14.13 and SR there under

10.8.2FAILURE OF LAST STOP SIGNAL AND ACTION TO BE TAKEN

Cause of failure of the LAST STOP SIGNAL	Action to be taken
1. When it cannot be taken OFF even though LINE CLEAR has been obtained; or;	The LAST STOP SIGNAL should be considered to have failed and failure shall be informed to Signal staff immediately. The LINE CLEAR shall be obtained on the BLOCK PANEL and Line Clear ticket/Paper line clear as prevalent on railway shall be issued to driver of train.
2. When it can be cleared without obtaining LINE CLEAR; or;	The LAST STOP SIGNAL should be considered to have failed and failure shall be informed to Signal staff immediately and follow 10.8.1.16-10.8.1.17.
3. It do not restore to ON position on entry of train into Block Section.	The LAST STOP SIGNAL should be considered to have failed and failure shall be informed to Signal staff immediately and follow 10.8.1.16-10.8.1.17.

10.8.3SUSPENSION OF BLOCK WORKING AND ACTION TO BE TAKEN

Cause of Suspension	Action to be taken
---------------------	--------------------

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 48 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

1. When material lorries or Motor trolleys or Tie-tamping machines or Rail Motor/ Bus or Rail cum road vehicle or Tower wagon (4 wheeler) has to run in the section.	BLOCK PANEL shall be suspended for respective line and these vehicles shall be worked on PAPER LINE CLEAR.
2. An accident takes place in the mid section.	BLOCK PANEL shall be suspended for both lines, if line adjacent to affected line is reported to be infringed, till the infringement exists for dispatch line or, LAST STOP SIGNAL shall be treated as INOPERATIVE and FAILED.
3. When any part of Block Panel is opened or removed for repairs under duly accepted disconnection notice.	BLOCK PANEL shall be suspended LAST STOP SIGNAL shall be treated as INOPERATIVE and FAILED.
4. When Last Stop Signal of the station has been taken by Signal staff for repairs.	LAST STOP SIGNAL shall be treated as INOPERATIVE and FAILED.
5. During Block FORWARD.	LAST STOP SIGNAL shall be treated as INOPERATIVE and FAILED.

- 10.8.3.1 When the cause of suspension of BLOCK PANEL and/or LAST STOP SIGNAL is removed the normal working of BLOCK PANEL and/or LSS as the case may be, shall be restored by SM.

10.9 TECHNICAL SCHEME:

10.9.1 DESCRIPTION OF CIRCUIT WITH UFSBI:

10.9.2 To dispatch a train

At Sending Station	At Receiving Station
<p>The following relays are normally energised in LINE CLOSED. ASGNCR↑, [D] AZTR↑.</p> <p>The following indications are ON. LINE CLOSED-Yellow, SNK-Yellow, LINE FREE — green, Last Stop Signal — Red.</p>	<p>The following relays are normally energised in LINE CLOSED. BTSR↑, HSATPR↑, HSBTPR↑, ASGNCP↑,[R] AZTR↑. HSGNCR↑.</p> <p>The LCB key is IN.</p> <p>The following indications are ON. LINE CLOSED -Yellow, SNK-Yellow, LINE FREE-Green, SNOEK-Yellow, Last stop Signal-Red.</p>

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 49 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

1	<p>a) The SM at sending station inserts its SM key and turns to IN position. SM Key — Green.</p> <p>b) Presses BELL button. BPNR↑ and TRAIN GOING TO button. TGTNR↑.</p> <p>c) TGTXR relay picks up, provided the conditions for receiving LINE CLEAR exist and transmits LINE CLEAR enquiry.</p> <p>Waits for 'TRAIN GOING TO' indication to light up GREEN.</p>	2	<p>a) TCFXR picks up.</p> <p>b) TCFR operates and latches, provided the conditions for granting LINE CLEAR exist.</p> <p>c) 'LINE CLOSED' turns 'OFF'.</p> <p>d) TCFK (G) "TRAIN COMING FROM" indication GREEN turns 'ON'.</p> <p>e) sends LINE CLEAR granted code.</p>
3	<p>a) TGTyr picks up.</p> <p>b) TGTZR↓.</p> <p>c) TGTR picks up and latches and TGTXR↓.</p> <p>d) "LINE CLOSED" indication turns 'OFF'.</p> <p>e) TGTK (G), "TRAIN GOING TO" indication lights up GREEN.</p> <p>f) Releases BELL and TRAIN GOING TO buttons. BPNR↓ TGTNR↓.</p> <p>g) Advance Starter signal can be taken 'OFF' by SM control. ASGNCR↓ ASCR↑, SNK - OFF, LSS-Green.</p>	4	<p>TCFXR↓.</p> <p>ASGNCPR↓, SNOEK-extinguished.</p>
5	<p>a) Train enters Block Section ASCR↓, AZTR↓, BTSR↓.</p> <p>b) LINE FREE indication turns RED.</p> <p>c) TGTK (G) indication changes to TGTK(R), LSS Red.</p> <p>d) SECTION Buzzer sounds with indication near ACKN button.</p> <p>e) SM presses ACKN to silence the SECTION buzzer and turn 'OFF' aforesaid indication.</p> <p>f) TGTyr↓.</p> <p>g) Restores all Signal controls to Normal ASGNCR↑, SNK-yellow.</p> <p>h) Train in section</p>	6	<p>a) Train enters Block Section.</p> <p>b) AZTR↓, BTSR↓.</p> <p>c) LINE FREE indication turns RED.</p> <p>d) TCFK (G) indication changes to TCFK(R).</p> <p>e) SECTION Buzzer sounds with indication near ACKN button.</p> <p>f) SM presses ACKN to silence the SECTION buzzer and turn 'OFF' aforesaid indication.</p> <p>g) ASGNCPR↑, SNOEK-Yellow.</p> <p>g) Train in section.</p>

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 50 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

		7	<ul style="list-style-type: none"> a) Train is received by reversing the Home Signal Lever. HSGNCR↓, SNK-OFF. b) Train occupies HSAT, HSATPR↓, TAR1↑ and sticks. c) Train occupies HSBT, HSBTPR↓ and clears HSAT, HSATPR↑TAR2↑ and sticks. d) TAR1↓. e) AZTR↑ , Line Free -Green f) SECTION Buzzer sounds with indication near ACKN button. g) SM presses ACKN to silence the SECTION buzzer and turn 'OFF' aforesaid indication. h) FR1 and FR2 operate to give flashing indications. i) TCFK(R) changes to TCFK (flashing green).
8	<ul style="list-style-type: none"> a) [D] AZTR↑. b) LINE FREE indication turns GREEN. c) FR1 and FR2 operate to give flashing indications. d) TGTK(R) changes to TGTK (flashing green). e) FR1 and FR2 transmit TGTZR↑ to other station. (this proves all signals at sending station at Normal before closing the section at receiving station). 	9	<ul style="list-style-type: none"> a) Normalises all reception controls to pick up HSGNCR, SNK-Yellow. b) Waits for TGTZR to pick up and on its pick up, de-latches TCFR. c) BTSR↑. d) LINE CLOSED indication turns ON. e) TCFK (flashing green) turns OFF.
10	<ul style="list-style-type: none"> a) TGTR↓. b) LINE CLOSED indication turns ON. c) TRAIN GOING TO Flashing Green indication turns OFF. 		

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 51 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

11.0 Method Of "Line Clear Cancellation" Both For Single Line & Double Line (Before entry of train in the Block Section).

After a train sending station has taken line clear, the receiving station can carry out line clear cancellation with the consent of other end station. Sending station puts back LSS to "ON", if already taken "OFF" and its control to normal ensures SNK at "YELLOW". Sending station extends co-operation by pressing CANCEL CO-OPERATION button.

On receipt of co-operation indication, receiving station presses bell and cancel button with SM KEY "IN". Receiving station observes cancel indication to light up flashing yellow and releases the buttons. TRAIN GOING TO/ TRAIN COMING FROM Arrow Head Indication turns to flashing green at sending/receiving station respectively. After 120 seconds LINE CLOSED indication lights up "YELLOW". TRAIN GOING TO/ TRAIN COMING FROM Arrow Head Indication and cancel indication extinguishes.

11.1 Method of Cancellation

SENDING STATION		RECEIVING STATION	
1.	PUTS back LSS to 'ON', if already taken 'OFF, ensures SNK at YELLOW, Advises receiving end station SM about cancellation on telephone after prescribed BELL code.	2.	Agrees to request, ensures SNK at YELLOW and SNOEK at YELLOW and gives consent on telephone after prescribed BELL code.
3	After verbal consent from other end SM, presses cancel co-operation button and releases on receipt of bell code.	4.	Waits for co-operation light up yellow and presses, bell & cancel button with SM key IN. Cancel counter increments. TRAIN COMING FROM Arrow Head indication turns to flashing green. Cancel indication lights up flashing yellow & continues flashing for 120 seconds.
5.	'TRAIN GOING TO' indication turns flashing green.		
7.	'TRAIN GONG TO' Indication turns off LINE CLOSED indication lights up.	6.	On expiry of 120 seconds, TRAIN COMING FROM Indication & cancel indication turns off. LINE CLOSED indication lights up.

12.0 Design Criteria:

All electronic components including connectors Shall be of industrial grade and shall comply Cl.5.1 of RDSO/SPN/144, as applicable.

13.0 System Requirement

- 13.0 Quick replacement of faulty components and parts.
- 13.1 Easy and fast maintenance of panel.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 52 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

- 13.2 Cost effectiveness without loss of reliability and performance.
13.3 User friendly regarding operation & maintenance.

14.0 Information to be given by Supplier:

- 14.1 The type of cable with number of core to be required including 10 % spare for connecting the panel with Relay rack.

15.0 Information to be given by Purchaser:

- 15.1 Requirement of single line block or Double Line block.
15.2 Communication Media from station to station is quad cable or voice channel in OFC.
15.3 Distance between block panel and relay rack, type of cable between them.
15.4 Any other information, as deemed fit

16.0 DOCUMENTATION

- 16.1 Two copies of the following documents shall be supplied.
16.2 Wiring diagram and termination details
16.3 Installation and maintenance manual. This should also include following information:
- Guaranteed performance data, technical and other particulars
 - Schematic block diagram showing mounting arrangement of various modules/components
 - Mechanical drawings of all type of modules, control panel along with specification of material used and part list
 - Part no. and manufacturer's data sheet of LEDs, switches/ buttons and their components, used.
 - Trouble shooting procedure
 - Dos & Don'ts
 - Installation check list

17.0 ACCEPTANCE CRITERIA

- 17.1 **Following shall** be provided by manufacturer for evaluating the product before it is considered suitable for signalling application on Indian Railways:
- 17.1.1 Remarks/compliance for all clauses of this specification
- 17.1.2 Detailed quality assurance plan along with its flow chart detailing manufacturing criteria, raw material specification and its source of procurement, test and monitoring details from raw material stage to finished product to ensure manufacturing a reliable and quality product as per this specification, etc.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 53 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

17.1.3 All documents as per Cl. 16.0

17.2 Manufacturing unit should be ISO (International Organisation for Standardisation) certified and should have requisite manufacturing and test infrastructure to produce a reliable and quality product as per this specification.

17.3 Manufacturer should guarantee for supply of spares for minimum 10 years.

17.4 Manufacturer shall arrange for any other test and / or documents considered necessary to establish quality and performance of the product.

17.5 Block Panel with UFSBI shall be supplied with following sub-systems:

- i) Universal fail safe block interface .
- ii)Block Panel.
- iii) Relay rack with pre-inspected relays.
- iv)Block telephone.

18.0 Inspection

18.1 Inspection shall be conducted by RDSO along with UFSBI, relays & EKT (For Single Line Only)

19.0 Test Procedure:

19.1 **Block Panel** shall be tested with Digital Axle Counter Block working as per **SIF 0643/SIF 0644**.

20.0 Marking —

20.1 The Block Panel shall be distinctly and indelibly marked with the following information:

- (i) Reference number
- (ii) Rated voltage
- (iii) Lot/Batch No.
- (iv) Manufacturer's name or trademark
- (v) Month and year of manufacture in code for example March 1993 may be marked as 393.

21.0 Packing

21.1 Block panel and other equipments shall be properly packed with thermocol packing and / or bubble sheet on the inner surface all around and suitable wooden crates to avoid damages during transit, storage and handling.

22.0 Warranty:

22.1 The manufacturer shall warrant the Block Panel covered by this specification to be free from defects in design, material and workmanship under ordinary use and service, his obligation under this warranty being limited to replace free of cost the Block Panel which shall be found defective before installation in the field within one year after delivery to the purchaser.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 54 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

23.0 Climatic Test

Climatic Test shall be done as per the sub clauses mentioned below. After completion of all the tests, high voltage test & insulation resistance test shall be repeated

23.1 Change of Temperature Test:

23.1.1 The equipment shall be tested as per IS-9000/Pt.XIV Sec-2.

23.1.2 The test severity shall be -

i) Lower Temperature: $-10^{\circ}\text{C} \pm 3^{\circ}\text{C}$

ii) Higher Temperature: $+70^{\circ}\text{C} \pm 2^{\circ}\text{C}$

Rate of cooling and heating 1 degree per minute. Duration of test: 3 cycles of 3 hrs each (after stability in the chamber has been reached). The equipment shall be kept energized during the test and status of relay shall be recorded. After completion of test, the equipment shall be subjected for standard recovery of 2 hours (15 - 35 degree C, RH 45 -75 %), After recovery, the equipment shall be checked visually for any damage and its insulation resistance shall be measured which shall not be less than 10 Mega ohms at 40 degree C and 60 % RH.

23.2 Dry Heat test:

The equipment shall be tested as per IS-9000/Pt.III Sec. 5. The test severity shall be $+70 \pm 2$ deg. C and duration of exposure 16 hrs. (After stability in the chamber has been reached). Rate of change of temperature shall be 1 degree per minute. The equipment shall be switched ON when the temperature in the chamber has stabilized and remained active during the above tests and status of relay shall be recorded. After completion of test, the equipment shall be subjected for standard recovery of 2 hours (15 - 35 degree C, RH 45 -75 %), After recovery, the equipment shall be checked visually for any apparent damage or deterioration and insulation resistance shall be measured which shall not be less than 10 Mega ohms at 40 degree C and 60 % RH.

23.3 Cold test:

The equipment shall be tested as per IS-9000/Pt.II Sec. 3. The test severity shall be -10 ± 2 deg. C and duration of exposure 2 hrs. (After stability in the chamber has been reached). Rate of change of temperature shall be 1 degree per minute. The equipment shall be switched ON when the temperature in the chamber has stabilized and remained active during the above tests and status of relay shall be recorded. After completion of test, the equipment shall be subjected for standard recovery of 2 hours (15 - 35 degree C, RH 45 -75 %), After recovery, the equipment shall be checked visually for any apparent damage or deterioration and insulation resistance shall be measured which shall not be less than 10 Mega ohms at 40 degree C and 60 % RH.

23.4 Damp Heat Test (Cyclic):

The equipment shall be tested as per IS-9000 / Pt.V Sec-2. The upper temperature shall be $+40$ deg C, lower temperature $+25$ degree C, RH 95 %, Variant 1, 1 cycle 12 + 12 hours and 6 number of cycles. The equipment shall be kept energized during the test. No intermediate measurements required only relay status to be recorded. After standard recovery of 2 hours, the equipment shall be checked visually for any apparent damage or deterioration and insulation resistance shall be measured which shall not be less than 10 Meg ohms at 40 degree C and 60 % RH.

23.5 Damp Heat Test (Steady state):

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 55 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

The equipment shall be tested as per IS-9000 / Pt.IV. The temperature shall be maintained $+ 40 \pm 2$ deg C, and relative humidity 95 %, (+2% 3%). The duration of the test is 4 days. The equipment shall be kept energized during the test. No intermediate measurements required only relay status to be recorded. After standard recovery of 2 hours, the equipment shall be checked visually for any apparent damage or deterioration and insulation resistance shall be measured which shall not be less than 10 Meg ohms at 40 degree C and 60 % RH.

23.6 Salt Mist Test:

This test shall be carried out as per RDSO/SPN/144(latest version)..

23.7 Dust Test:

The equipment shall be tested as per IS-9000 Pt. XII. The item shall be subjected in the chamber at laboratory temperature in switched off condition. The temperature of the chamber shall then be raised to a value of $40 \text{ deg C} \pm 3 \text{ deg C}$ with a relative humidity not exceeding 50% shall be maintained in the test chamber. When the temperature stability has been attained, the test item shall then be subjected to a stream of dust-laden air for a period of one hour. After standard recovery of 2 hours, the equipment shall be checked for any deterioration and insulation resistance shall be measured which shall not be less than 10 Meg ohms at 40 deg C and 60% RH.

23.8 7 KV Static Discharge Test:

The test shall be done as per RDSO/SPN/144(latest version)..

23.9 Vibration Test:

The equipment shall be subjected to vibration test as per IS: 9000 (Part VIII).

Specification Details.	Severities		Observation /Remarks
Vibration test as per IS 9000 Pt. VIII	Frequency range	10 Hz – 55 Hz	Equipment shall be visually examined for any apparent damage. After completion of the test the equipment shall be tested for its normal operation.
	Amplitude	0.35mm (0 to peak) or 5g	
	No. of axis	3	
	No. of sweep cycles	20 sweep cycle per axis	
	Total duration for the 20 sweep cycles	1 hour 45 minutes when frequency of vibration is changed as per clause 6.3 of IS-9001 Pt.XIII-81 during each sweep	
	If resonance is observed, endurance tests at resonant frequency.	10 minutes at each resonant frequency	

23.10 Fail-safety test:

Fail safety tests shall be carried out as per RDSO/SPN /144(latest version). as covered under the clause 4.0 and as per CENELEC EN50129.

			Printed:
Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Page 56 of 58

ISO 9001:20152008	Document No- IRS:S-105/20252012	Version:1.0 0	Date Effective:DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

23.11 Axle counter should tolerate induced voltage of at least 400V AC, 50Hz on the quad cable. Any external surge protection device required to achieve this shall be part of SSDAC supply.

23.12 Environmental Stress Screening Tests (ESS) for Printed Assembly Boards (PAB) and Subsystems

The manufacturer shall carry out the following ESS tests on all modules on 100% basis (except bump test) during production/testing in the sequence as follows. Suitable records shall be maintained regarding the compliance of these tests-

a) Vibration Test

PCBs in unpacked condition shall be subjected to vibration test for 10 minutes at the resonant frequency/frequencies at 3.0 g minimum acceleration in the axis /axes perpendicular to the mounting of components. In addition to physical checks, the electrical parameters are also to be monitored after the vibration test.


b) Bump Test

PCBs /modules/units in packed condition shall be subjected to bump test at 40 g for 1000 bumps. This test shall be carried out as per sampling plan given in Clause 7.2.5, 7.2.6 & 7.2.7 of IRS:S 42/85 for Axle Counter Equipment. In addition to physical checks, electrical parameters are also to be monitored after the bump test.

c) Thermal Cycling

The PCBs shall be subjected to thermal cycling as per the procedure given below:

The Assembled Boards are to be subjected to the Rapid Temperature Cycling as mentioned below in the power OFF condition. This temperature cycling is from 0 to 70°C, ½ hour at each temperature for 9 cycles and 1 hour at each temperature for the 10th cycle. Dwell time of 1 hour is provided for the last cycle in order to oxidize defective solder joints exposed through thermal stress.

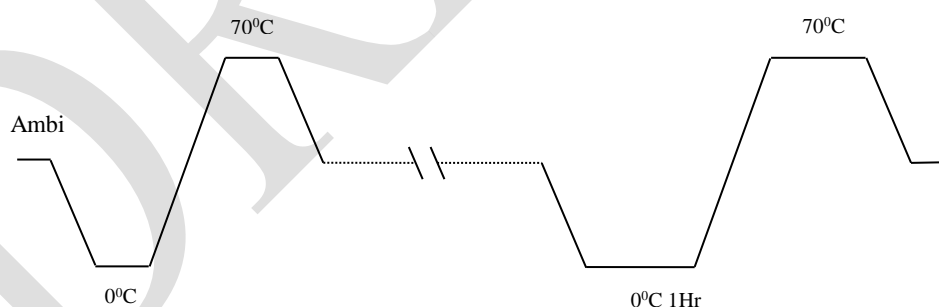

The rate of rise /fall of temperature shall be minimum 10°C/minute.

In addition to physical checks, the electrical parameters are also to be monitored after this test.

d) Power Cycling

The power supply modules shall be subjected to 60 (sixty) ON-OFF cycles for one hour. (The ON-OFF) switch usually provided in the modules may not be used for this purpose.

24.0 The test for Software check-sum

Through suitable means, the total size of the software of each sub-system shall be measured and recorded. The manufacturer shall specify the size of software with version number of each sub-system at the time of applying for type approval.

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 57 of 58
---------------------------	------------------------------	----------------------------------	------------------------------

ISO 9001: 20152008	Document No- IRS:S-105/ 20252012	Version: 1.0 0	Date Effective: DD-MM-2025 13.09.2012
Document Title : Specification for Block Proving By Axle Counter Using UFSBI (BPAC)			

25.0 VENDOR-CHANGES IN APPROVED STATUS: (Compliance of Document No - QO-D-8.1-11)

All the provisions contained in RDSO's ISO procedures laid down in Document No. QO-D-8.1-11 (title "Vendor-Changes in approved status") and subsequent versions/amendments thereof, shall be binding and applicable on the successful vendors in the contracts floated by Railways to maintain quality of products supplied to Railways.'

Prepared By: SSE/D/S&T	Checked By: ADE/Signal-VI	Issued By: Director/Signal-II	Printed: Page 58 of 58
---------------------------	------------------------------	----------------------------------	--