

Quotation Notice No.: RDSO/2020/Store/UPS/1829/01 dated 11.08.2021.

Name of work: Provision of centralized UPS with redundancy in QA/S&T Directorate HQ unit of RDSO Lucknow.

Fax: 0522-2458500
Phone: 0522-2451206



Government of India - Ministry of Railways
Research Designs & Standards Organisation
Lucknow - 226011



Quotation Notice

No.: RDSO/2020/Store/UPS/1829/01

Date: 11.08.2021

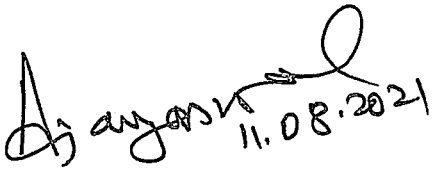
Sub: Provision of centralized UPS with redundancy in QA/S&T Directorate HQ unit of RDSO Lucknow.

Your sealed Quotation offer for above mentioned work as per the schedule of work enclosed (Annexure-A) is invited by Deputy Director/QA/S&T/RDSO/Lucknow at estimated cost of **Rs. 1,22,845/-** with completion period of **one month**.

Please submit your quotation offer up to **18.08.2021** till **15:00 Hrs.** in the office of Deputy Director/QA/S&T/RDSO/Lucknow, Room No. 415A, 4th Floor, Abhikalp Bhavan, Annexe-II, Manak Nagar Lucknow-226011. Quotation offer shall be opened on the same day at **15:30 Hrs** in the chamber of Deputy Director/QA/S&T/RDSO/Lucknow. In case, the **18.08.2021** happens to be a holiday the Quotation offers shall be received and opened on the next working day at the same time and place. Schedule of work is attached on which the offer price in percentage above/below at par in comparison to the estimated rates is to be quoted. Tenderer should be registered with GST; it is requested to submit the GSTIN number along with the offer, failing which will result in cancellation of offer.

Note: 6kVax2 UPS and 16 Nos. of 12V SMF batteries shall be provided by QA/S&T/LKO for carrying the above work.

DA: As above


11.08.2021

Contractor's signatures
(Seal)

Deputy Director/QA/S&T/RDSO/LKO

Copy to:

1. Deputy Director/Finance: For deputing official for opening of quotation on **18.08.2021** at **15:00 Hrs.**
2. ADE/TMS – for publishing the quotation notice on the website.
3. Notice Boards of Annex – I, II and Administration Building.

Annexure –A

Schedule of Work

S. No.	Details of Items	Unit	Qty.	Estimated Cost		Cost offered by the bidder		
				Rate in Rs. (in figure)	Amount in Rs. (in figure)	Rate in Rs. (in figure)	Amount in Rs. (in figure)	Amount (in Words)
1.	Supply of 15U wall mount rack for UPS with FAN, PDU, wire manager and sufficient hardware.	Nos.	1	12,450.00	12,450/-			
2.	Supply of suitable MS rack for battery bank.	Nos.	1	14,160.00	14,160/-			
3.	Modular power box with 4 sockets 15 Amp and 4 switches 15 Amp	Nos.	20	2,550.00	51,000/-			
4.	Supply of power cable 3 core 2.5 sq. mm	Mtrs.	270	96.50	26,055/-			
5.	Supply and fixing of 25 mm PVC casing and capping	Mtrs.	200	52.00	10,400/-			
6.	Laying of power cable in 25 mm PVC casing and capping	Mtrs.	270	14.00	3,780/-			
7.	Installation, testing and commissioning of online UPS with complete wiring work	Job	1	5,000.00	5,000/-			
Total						1,22,845/-		

You are requested to fill up the rates against scheduled item mentioned above and submit the same in the sealed envelope in the box provided at office of Deputy Director/QA/S&T/RDSO/LKO, Room No. 415A, 4th Floor, Abhikalp Bhavan, Annexe-II, Manak Nagar Lucknow-226011.
Quotation shall be Opened at **15:30 Hrs. on 18.08.2021.**

Note:

1. 6kVx2 UPS and 16 Nos. of 12V SMF batteries shall be provided by QA/S&T/LKO for carrying out the above work.
2. Parties are advised to visit the site proposed for work for their estimate.
3. The quotation offer shall be valid for 90 days from the date of opening of the quotation.
4. Single Rate to be quoted for above work should be in figures and words. In case of any discrepancy in rate quoted in figures & words, the rate given in words shall be taken as final. Rate should be clearly written and in case of any ambiguity or multiple rates, offer shall be summarily rejected.
5. There shall not be any cutting/overwriting in the offered value. In case of cutting/overwriting, the offer shall be summarily rejected.

Date:

Tenderer's signature and Seal

DA

Quotation Notice No.: RDSO/2020/Store/UPS/1829/01 dated 11.08.2021.

Name of work: Provision of centralized UPS with redundancy in QA/S&T Directorate HQ unit of RDSO Lucknow.

TERMS & CONDITION FOR SCHEDULES OF WORKS

The Terms & Condition for schedules of works is as under:

1.	The work should be completed within one month of issue of LOA.
2.	During installation fixing etc, this work shall be carried out as per direction of Site Engineer.
3.	Completion Period of Work:- The work of UPS wiring in RDSO, QA/S&T of Annexe-II building should be completed with-in one month from the date of receipt of acceptance letter in all respect.
4.	The bidder (whether his quotation accepted or not), shall treat the contents of his quotation as private and confidential. He shall also treat the prices quoted by him as strictly confidential till the quotation is opened.
5.	No CLAIM FOR REJECTION OF BIDDER: The quotation, when submitted, shall not constitute an agreement and the bidder shall have no cause of action of claim against the RDSO for rejection of his offer. The RDSO shall always be at liberty to reject or accept at his own discretion and any such action will not be called into question and the bidder shall have no claim in that regard against the RDSO.
6.	CAPABILITY OF THE BIDDER: The bidders shall provide satisfactory evidence acceptable to RDSO to show that: He is an experienced and established contractor who regularly undertakes the work in reputed organizations and has adequate technical knowledge and practical experience in this specific field. The bidder has to establish to the full satisfaction of RDSO his credentials and technical competency for executing such work.
7.	Payment: 90 % payment will be arranged after satisfactory completion of the work on submission of duly signed bill. Balance 10% shall be released after successful completion of warranty period. PAN, GSTN & Bank account details including IFSC & MICR code shall be submitted with the bill. Income tax and GST etc. will be deducted at source from the bill as per rule as applicable. Rate & Amount shall be quoted in both words & Figures. Free maintenance period: One year
8.	Warranty: Warranty period of each equipment may be different from the free maintenance period. Firm has to pass on full warranty benefits to the railway. Warranty from OEM for Active equipment to be given in the name of Railway authority. Warranty should be commencing after completion of work.

Acceptance of quotation shall be communicated by e-mail/FAX/Telex/Telegram/Express Letter or a formal letter of acceptance of quotation by RDSO. When acceptance is communicated by e-mail/FAX/Telex/ Telegram/ Express letters, the formal letter of acceptance will be sent to the bidder as soon as possible. Issue of e-mail/FAX/ Telex/ Telegram/ Express letter should be deemed to conclude the contract.

Date:

Tenderer's signature and Seal

Quotation Notice No.: RDSO/2020/Store/UPS/1829/01 dated 11.08.2021.
Name of work: Provision of centralized UPS with redundancy in QA/S&T Directorate HQ unit of RDSO Lucknow.

Execution of Schedule of work

Technical Specification & Special Conditions of the Work

1. **Brief Description of work:**
 - 1.1 As mentioned in the Schedule of Work 'Annexure - A' and as per the direction of the site engineer.
 - 2 **6kVx2 UPS installation and commission work along with wiring etc.:**
 - 2.1 There are Online 6KVx2 UPS and 16 Nos. of 12V SMF batteries available in QA/S&T, RDSO, Lucknow at Annexure -II building. This work is for wiring, installation and commissioning of UPS at QA/S&T, RDSO, Lucknow.
 - 2.2 Proper wiring and termination through PVC Casing & Capping. All these wirings are to be done as per standard practices.
 - 2.3 PVC casing-n-capping channels are to be fixed on the wall properly with help of suitable clamps & screws. All required accessories like T joints, bends screws etc. are to be supplied by the contractor as per the site requirements. All required masonry work like making holes in the wall for taking these pipes and repairing the wall after laying pipes are to be done by the contractor.
 - 2.4 The site engineer of RDSO shall decide the places where the UPS, Rack and other equipments pipes & channels are to be laid and Cable wirings are to be provided on the walls.
 - 2.5 If any breaking work is done on the wall, it shall be restored to its original condition after the work is completed.
 - 2.6 Channels are to be cut on the wall/floor for laying PVC casing-n-capping inside rooms/offices as decided by the RDSO engineer. Wall & Floor are to be repaired to their original condition after completion of these activities.
 - 2.7 All connecting Power Cables, power board wiring should be laying inside in PVC pipe or Casing-n-capping in a straight alignment and should be neat and clean and nicely executed.
 - 2.8 Various items mentioned in the schedule are to be executed as per standard practices being followed nationally/internationally as applicable.

