
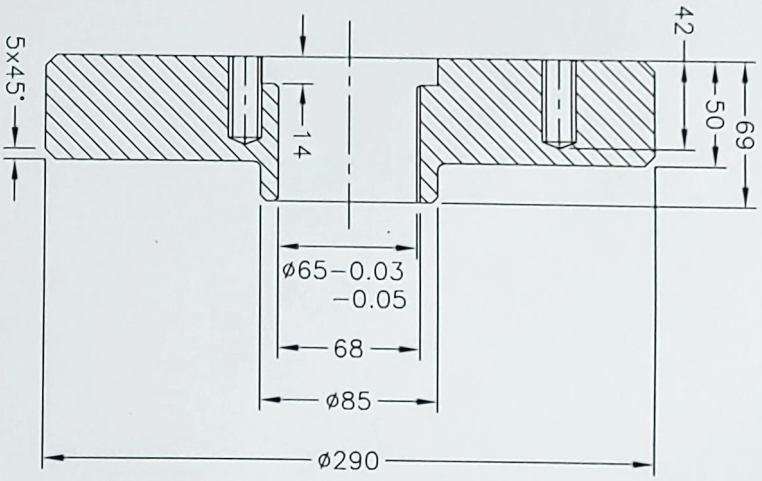


3-PULLER HOLE OF
M16x2 ON PCD 200

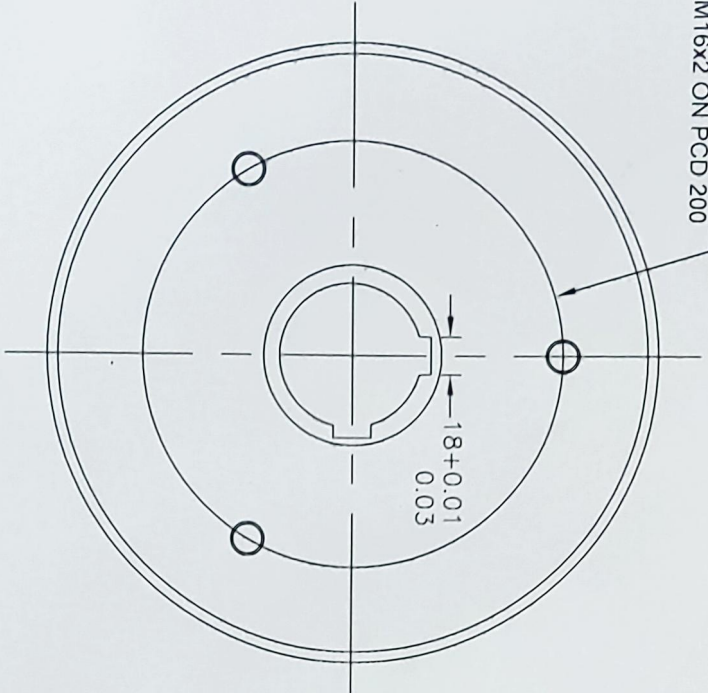

6. OPEN TOLERANCES AS PER IS 2768-1.
5. FLY WHEEL SHOULD BE BALANCE UPTO 5-15 GM.
4. TOLERANCES MAY BE INDICATED INDIVIDUALLY UPON SUITABILITY OF FITMENTS.
3. MATERIAL COMPOSITION AND OTHER DETAILS REFER TO RDSO'S SPECIFICATION NO. TM/HW/6/543
2. ALL SHARP CORNERS TO BE CHAMFERED.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

N O T E S

RDSO SPECIFICATION NO.
TM/HW/6/543

SPECIFICATION

SCALE

ALT

DESCRIPTION

AUTH

DRG. NO. RDSO/TM/13/23

R. D. S. O.
FLY WHEEL FOR TAMPING UNIT
OF UNIMAT-4S
(PART NO. CU20.302)
(PROVISIONAL)

CANC./S/REV
REVISED

DR. BY: A.K. SINGH
CH. BY: S.DAVY
PUT BY: S.DAVY
COR BY: A.K. SINGH
APPROVED BY: J. SINGH
DTN: 6/13/23