


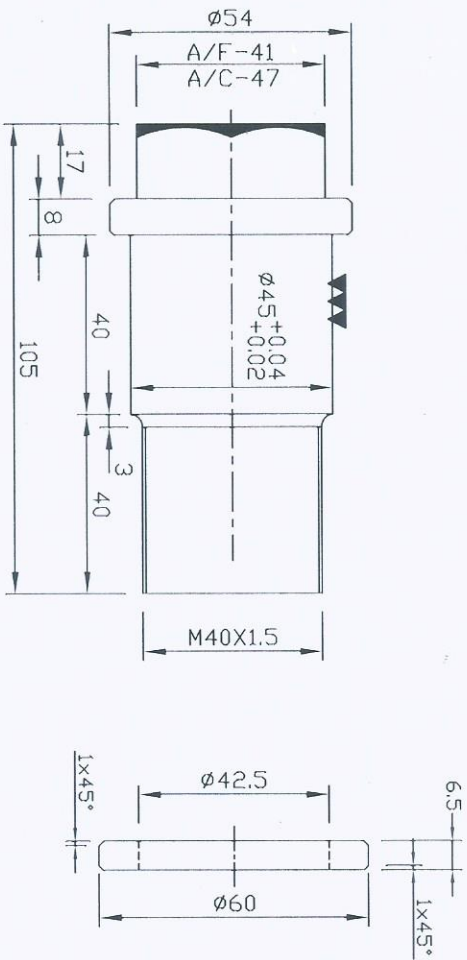

4. TOLERANCES MAY BE INDICATED INDIVIDUALLY UPON SUITABILITY OF FITMENTS.
3. MATERIAL COMPOSITION AND OTHER DETAILS REFER TO ROSO'S SPECIFICATION No.TM/HM/6/404.
2. ALL SHARP CORNERS TO BE CHAMFERED.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

NOTES

RDSO SPECIFICATION NO. TM/HM/6/404	SPECIFICATION
---------------------------------------	---------------

:1
SCALE

ALT

DESCRIPTION

AUTHY

DRG. No. RDSO/TM/19/17

CANC./SUPED REVVED.	REV-1
------------------------	-------

(PART No.—UD311.1205)
(PROVISIONAL)

	R.	D.	S.	O.
1.				
2.				
3.				
4.				
5.				
6.				
7.				
8.				
9.				
10.				
11.				
12.				
13.				
14.				
15.				
16.				
17.				
18.				
19.				
20.				
21.				
22.				
23.				
24.				
25.				
26.				
27.				
28.				
29.				
30.				
31.				
32.				
33.				
34.				
35.				
36.				
37.				
38.				
39.				
40.				
41.				
42.				
43.				
44.				
45.				
46.				
47.				
48.				
49.				
50.				
51.				
52.				
53.				
54.				
55.				
56.				
57.				
58.				
59.				
60.				
61.				
62.				
63.				
64.				
65.				
66.				
67.				
68.				
69.				
70.				
71.				
72.				
73.				
74.				
75.				
76.				
77.				
78.				
79.				
80.				
81.				
82.				
83.				
84.				
85.				
86.				
87.				
88.				
89.				
90.				
91.				
92.				
93.				
94.				
95.				
96.				
97.				
98.				
99.				
100.				

KNUCKLE JOINT WITH BOLT
OF UNIMAT-3S

(PART No.—UD311.1205)

(PROVISIONAL)

CANC./SUPED
REVIED.

REV-1

DR. BY: S. DAYAL 
CH. BY: A. SINGH 

PLT BY: A. SINGH *AS*
COM BY: S. DAYAL *SD*

APPROVED BY:	
DATE/TIME:	8/1/01 10:00

Handwritten signature: *[Signature]*