


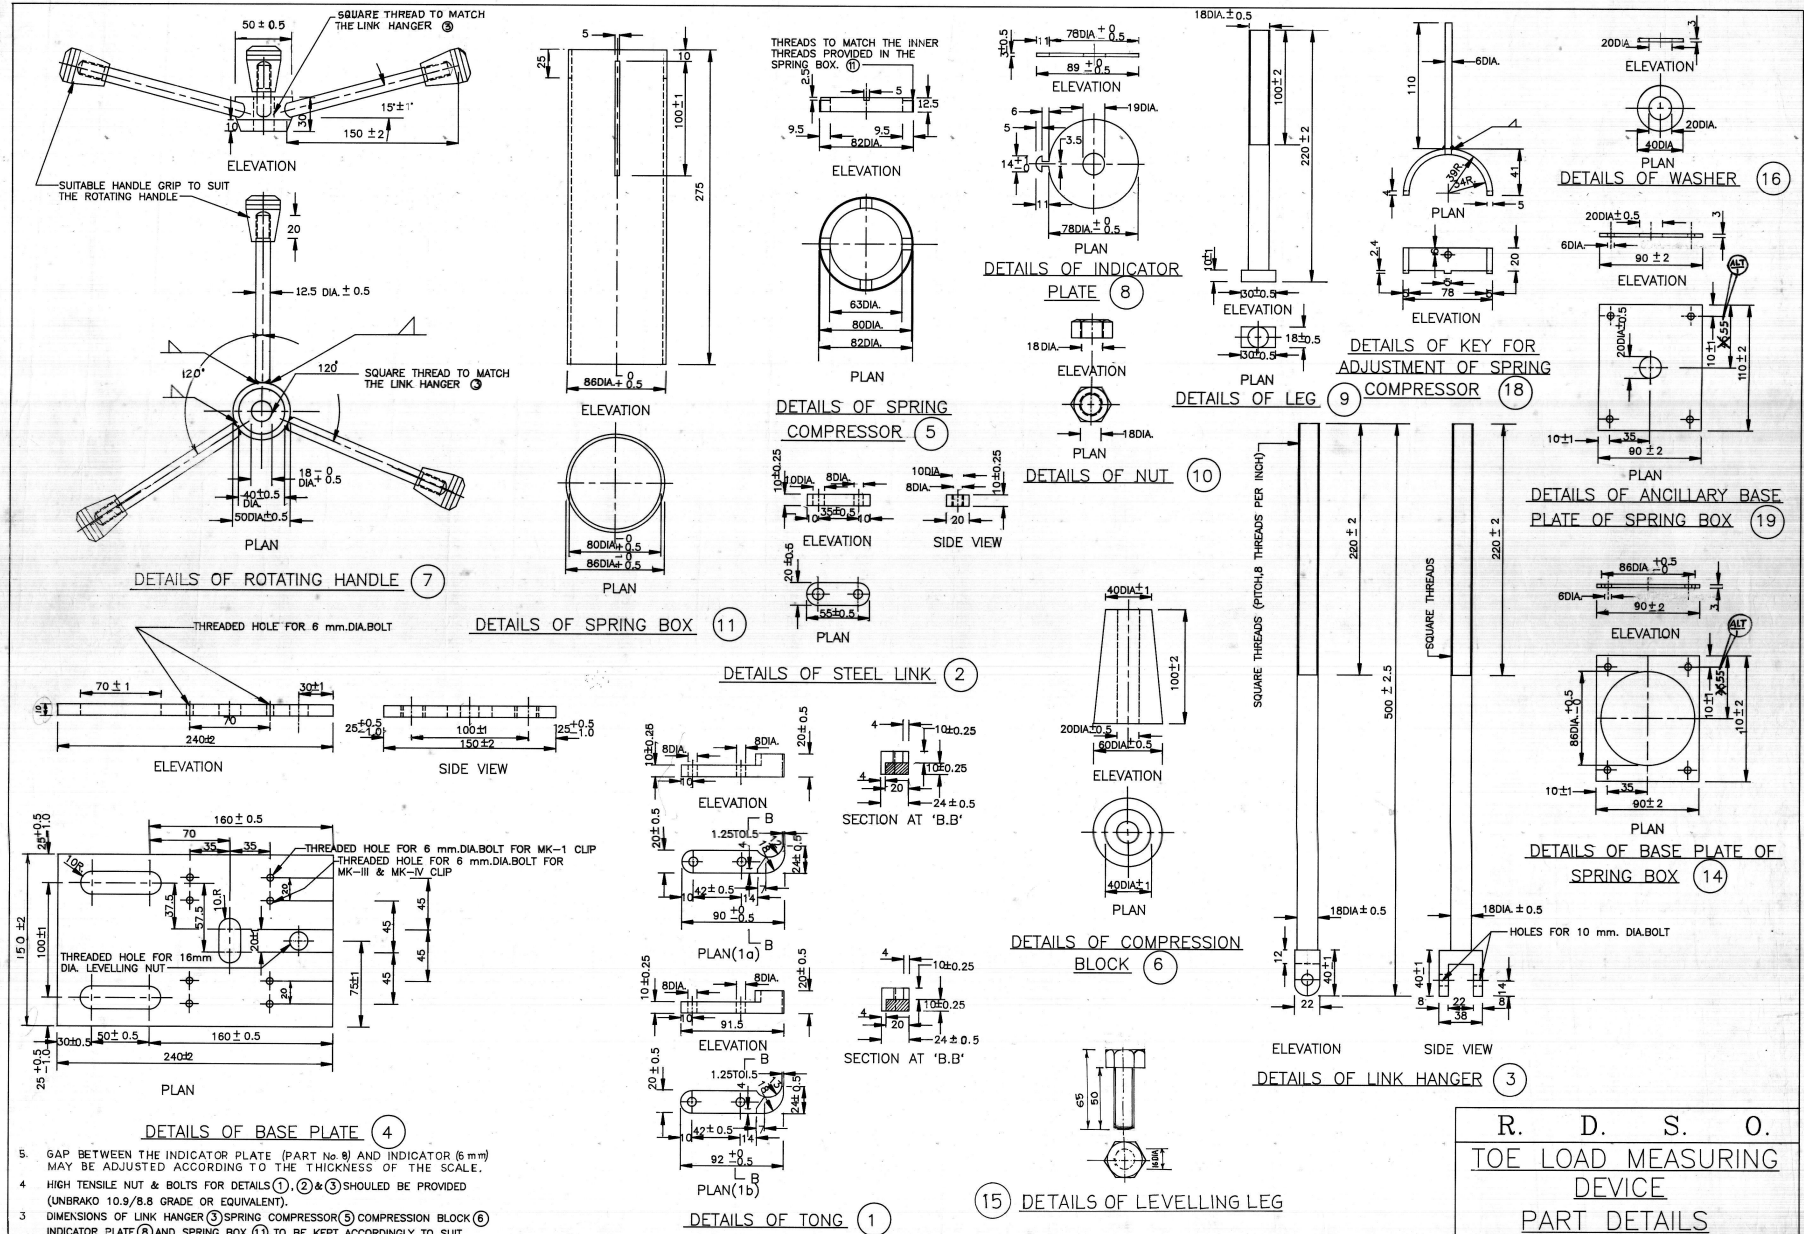

5. GAP BETWEEN THE INDICATOR PLATE (PART No. 8) AND INDICATOR (6 mm) MAY BE ADJUSTED ACCORDING TO THE THICKNESS OF THE SCALE.
4. HIGH TENSILE NUT & BOLTS FOR DETAILS (1), (2) & (3) SHOULD BE PROVIDED (UNBRAKO 10.9/8.8 GRADE OR EQUIVALENT).
3. DIMENSIONS OF LINK HANGER (3) SPRING COMPRESSOR (5) COMPRESSION BLOCK (6) INDICATOR PLATE (8) AND SPRING BOX (11) TO BE KEPT ACCORDINGLY TO SUIT DIMENSIONS OF MAIN SPRING.
2. INDICATES WELDING.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

NOTES

SPECIFICATION

NOT TO SCALE
SCALE

① DIMENSION ALTERED
ALT. DESCRIPTION AUTH.

CANCLD./SUPD. TO DRG. NO. TM/9501/2 (REV)
REVED.
DRG. NO. TM/9528/2

SHEET NO. 2 OF 2 SHEETS.

DR. BY: O.P. KAPOOR	PLT. BY: O.P. KAPOOR	APPROVED BY:
CH. BY: <i>[Signature]</i>	COM. BY: <i>[Signature]</i>	
FILE NO.	CAL. NO.	