


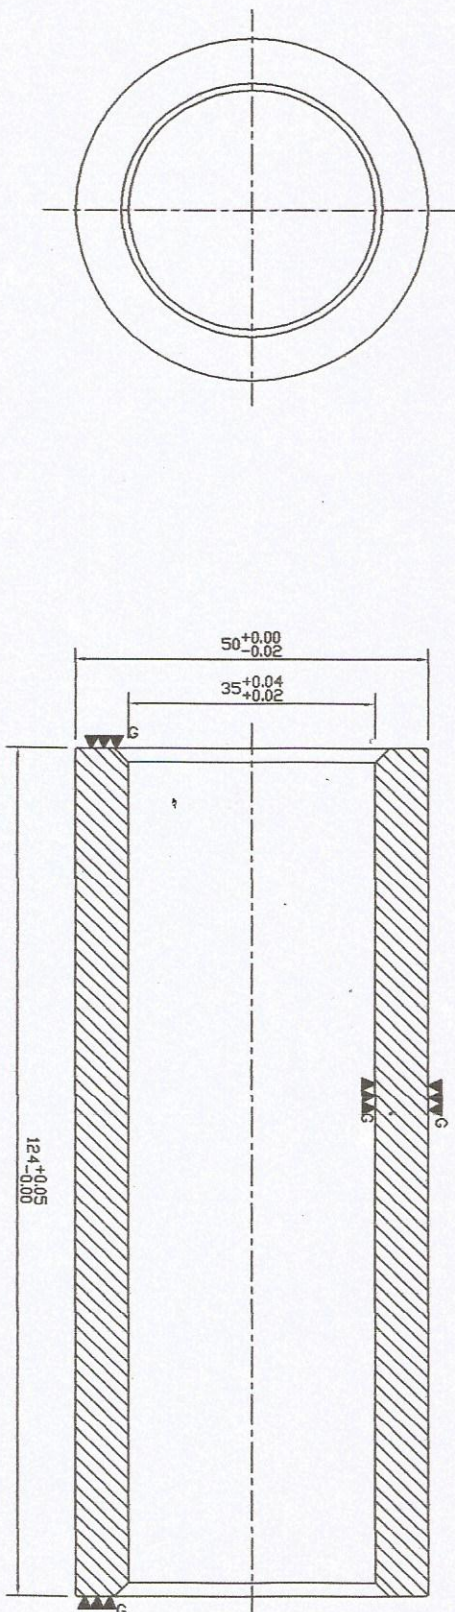

5. WHOLE JOB SHALL BE ALIGNED 90 FROM FACE OF BORE UP TO 20 MICRON.
4. TOLERANCES MAY BE INDICATED INDIVIDUALLY UPON SUITABILITY OF FITMENTS.
3. MATERIAL COMPOSITION AND OTHER DETAILS REFER TO ROSO'S SPECIFICATION No. TM/HM/6/195 Rev-2
2. ALL SHARP CORNERS TO BE CHAMFERED.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

N O T E S

RDSO SPECIFICATION
No. TM/HM/6/195 Rev-2

SCALE 1:1

ALT

DESCRIPTION

AUTHY

DRG. No. TM/0508 REV-2

SLEEVE FOR TAMPING UNIT
(PART No. 620.26b) (PROVISIONAL)

R. D. S. O.